



中山市晶艺光电科技有限公司  
ZHONGSHAN JEWELLY OPTOELECTRONIC TECHNOLOGY CO.,LTD.

# 样品承认书

品名：11\*44 橙色彩屏

规格：UL-1144A2O5

编号：2017-07

| 客户签字栏 |    |    |
|-------|----|----|
| 核准    | 审核 | 承认 |
|       |    |    |

| 本公司签字栏 |    |    |
|--------|----|----|
| 核准     | 审核 | 制作 |
|        |    |    |

地址：广东省中山市南区昌盛路4号

电话：0760-23886633 23886636 23886632

传真：0760-23886658

网址：[www.jlul.com](http://www.jlul.com)

电子邮箱：[jinglei@jlul.com](mailto:jinglei@jlul.com)



PART NO.: UL-1144A2O5

■ ELECTRICAL AND OPTICAL CHARACTERISTICS(Ta=25°C)


| Chip    |                  | Lens Appearance | Absolute Maximum      |         |         |           | Electro-optical Data(AT20mA) |      |     |          |
|---------|------------------|-----------------|-----------------------|---------|---------|-----------|------------------------------|------|-----|----------|
| Emitted | Peak Wave Length |                 | $\Delta \lambda$ (nm) | Pd (mW) | If (mA) | Peak (mA) | Vf (V)                       |      |     | IV (mcd) |
|         |                  |                 |                       |         |         |           | Min                          | Mean | Max | Typ.     |
| Orange  | 600-605          | White Diff.     | 20                    | 35      | 20      | 60        | 1.7                          | 2.0  | 2.5 | 80-90    |

Remark: Viewing angle is the Off-axis angle at which the luminous intensity is half the axial luminous intensity.

■ ABSOLUTE MAXIMUM RATINGS(Ta=25°C)

- Reverse Voltage.....5V
- Reverse Current(V<sub>R</sub>=5V).....20 μ A
- Operating Temperature Range.....-25°C~+80°C
- Storage Temperature Range.....-30°C~+80°C
- Lead Soldering Temperature..... 260°C For 5 Seconds

■ PACKAGE DIMENSION:

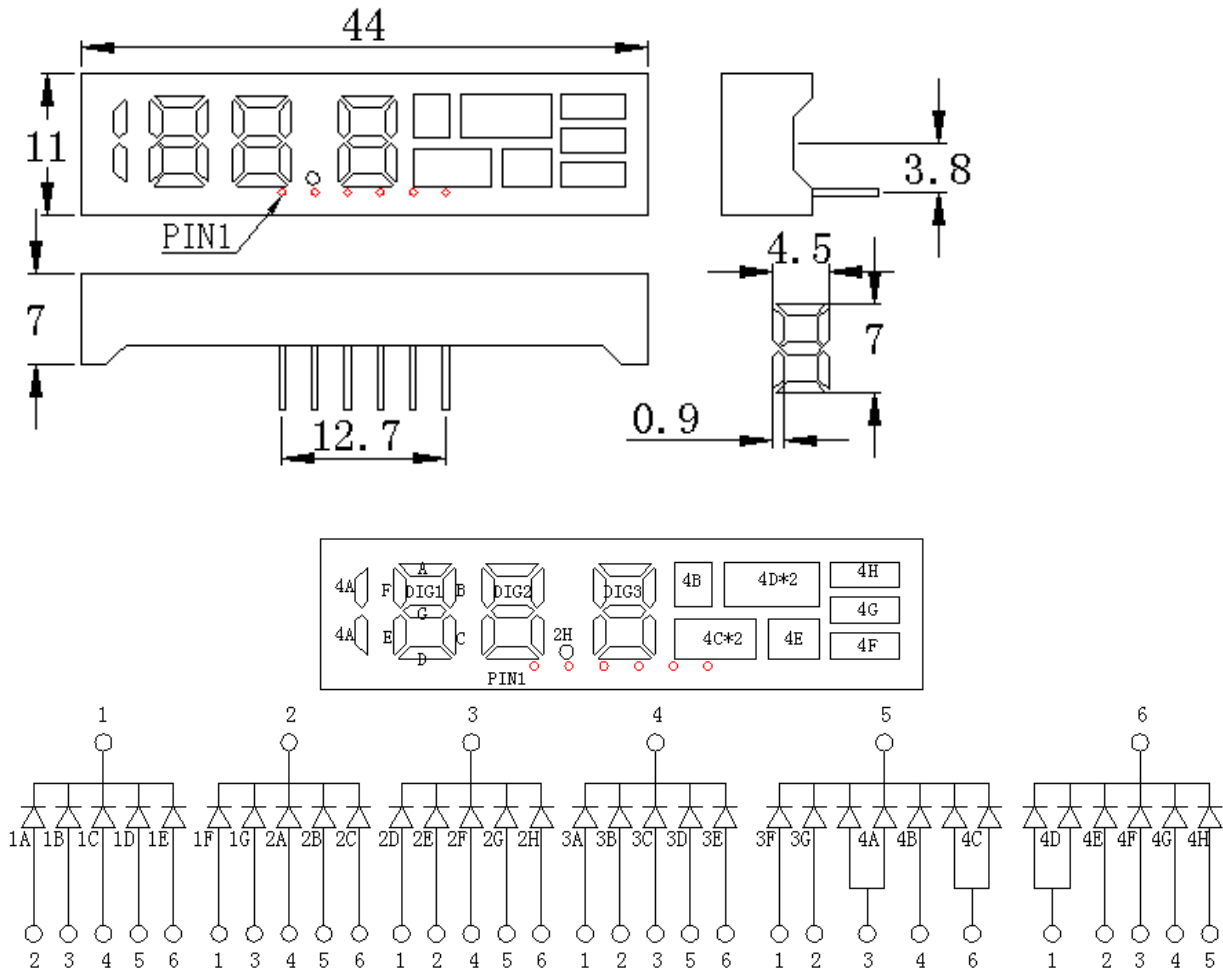

未标注尺寸公差为: ±0.2MM

客户名称:

工程确认:

日期:



PART NO.: UL-1144A2O5

TYPICAL ELECTRO-OPTICAL CHARACTERISTICS CURVE:

