



中山市晶艺光电科技有限公司  
ZHONGSHAN JEWELLY OPTOELECTRONIC TECHNOLOGY CO.,LTD.

# 样品承认书

品名： 17\*23 共阴白色彩屏

规格： UL-1723AW48

编号： 2017-07

客户签字栏		
核准	审核	承认

本公司签字栏		
核准	审核	制作

地址：广东省中山市南区昌盛路4号

电话：0760-23886633 23886636 23886632

传真：0760-23886658

网址：[www.jlul.com](http://www.jlul.com)

电子邮箱：[jinglei@jlul.com](mailto:jinglei@jlul.com)



PART NO.: UL-1723AW48

ELECTRICAL AND OPTICAL CHARACTERISTICS(Ta=25°C)


Parameter	Symbol	Min	Typ	Max	Unit	Test Condition
Wave Length	$\lambda P$	---	---	---	nm	IF=20mA(Note1)
Chromaticity Coordinates	X	---	---	---	---	IF=20mA
	Y	---	---	---		IF=20mA
Luminous Intensity	$\phi$	---	2.2	---	LM	IF=20mA
Viewing Angle	$2\theta 1/2$	--	----	--	Deg	IF=20mA
Forward voltage	VF	2.6	3.0	3.8	V	IF=20mA

Remark:Viewing angle is the Off-axis angle at which the luminous intensity is half the axial luminous intensity.

ABSOLUTE MAXIMUM RATINGS(Ta=25°C)

Reverse Voltage.....5V  
 Reverse Current( $V_R=5V$ ).....20  $\mu$  A  
 Operating Temperature Range.....-25°C~+80°C  
 Storage Temperature Range.....-30°C~+80°C  
 Lead Soldering Temperature..... 260°C For 5 Seconds

■ PACKAGE DIMENSION:

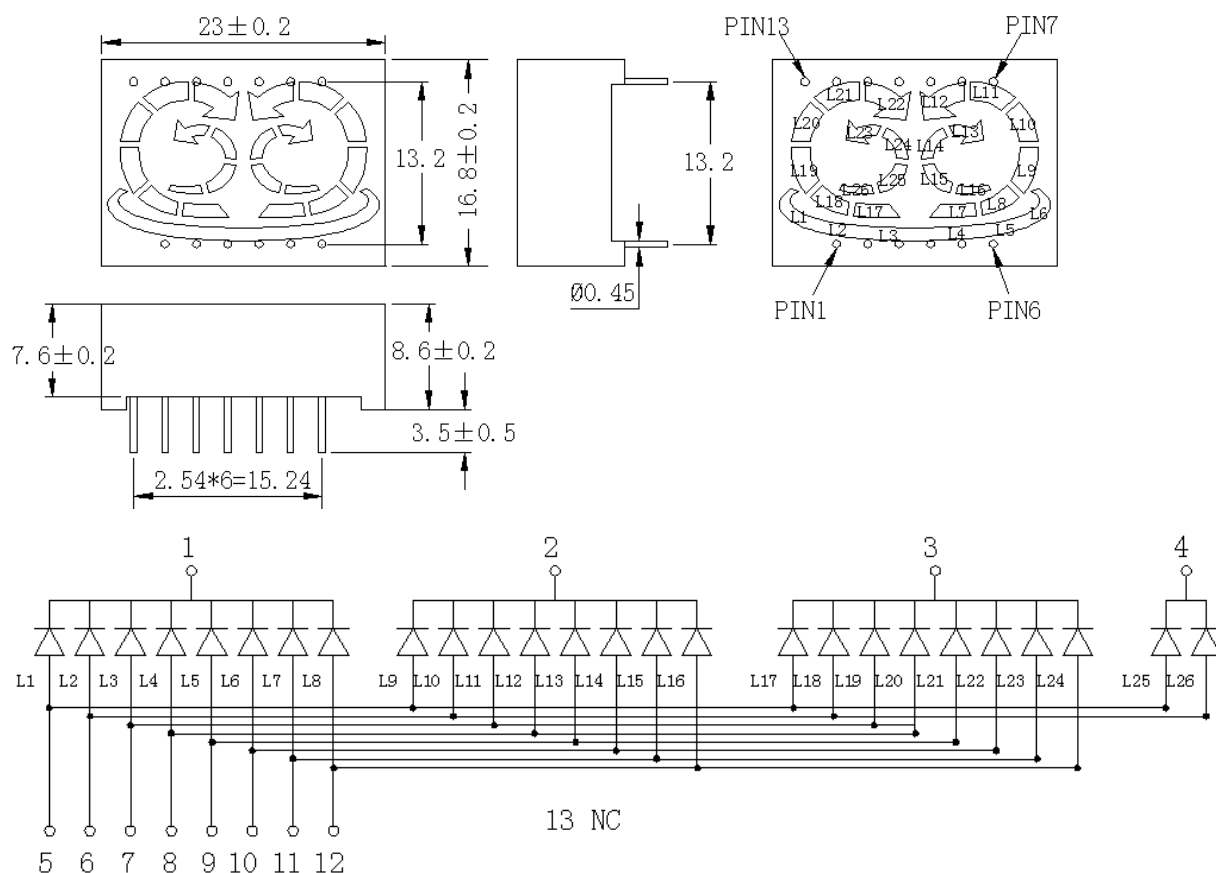

未标注尺寸公差为: ±0.2

客户名称:

工程确认:

日期:



PART NO.: UL-1723AW48

TYPICAL ELECTRO-OPTICAL CHARACTERISTICS CURVE:

