



中山市晶艺光电科技有限公司
ZHONGSHAN JEWELRY OPTOELECTRONIC TECHNOLOGY CO.,LTD.

样品承认书

品名： 20*27 共阳白色彩屏

规格： UL-2027BW

编号： 2017-07

客户签字栏		
核准	审核	承认

本公司签字栏		
核准	审核	制作

地址：广东省中山市南区昌盛路4号

电话：0760-23886633 23886636 23886632

传真：0760-23886658

网址：www.jlul.com

电子邮箱：jinglei@jlul.com



■ PART NO.: UL-2027BW

■ ELECTRICAL AND OPTICAL CHARACTERISTICS(Ta=25°C)


Parameter	Symbol	Min	Typ	Max	Unit	Test Condition
Wave Length	λP	---	---	---	nm	IF=20mA(Note1)
Chromaticity Coordinates	X	---	---	---	---	IF=20mA
	Y	---	---	---		IF=20mA
Luminous Intensity	ϕ	---	2.2	---	LM	IF=20mA
Viewing Angle	$2\theta 1/2$	--	----	--	Deg	IF=20mA
Forward voltage	VF	2.6	3.0	3.8	V	IF=20mA

Remark:Viewing angle is the Off-axis angle at which the luminous intensity is half the axial luminous intensity.



■ ABSOLUTE MAXIMUM RATINGS(Ta=25°C)

- Reverse Voltage.....5V
- Reverse Current(V_R=5V).....20 μ A
- Operating Temperature Range.....-25°C~+80°C
- Storage Temperature Range.....-30°C~+80°C
- Lead Soldering Temperature..... 260°C For 5 Seconds

■ PACKAGE DIMENSION:

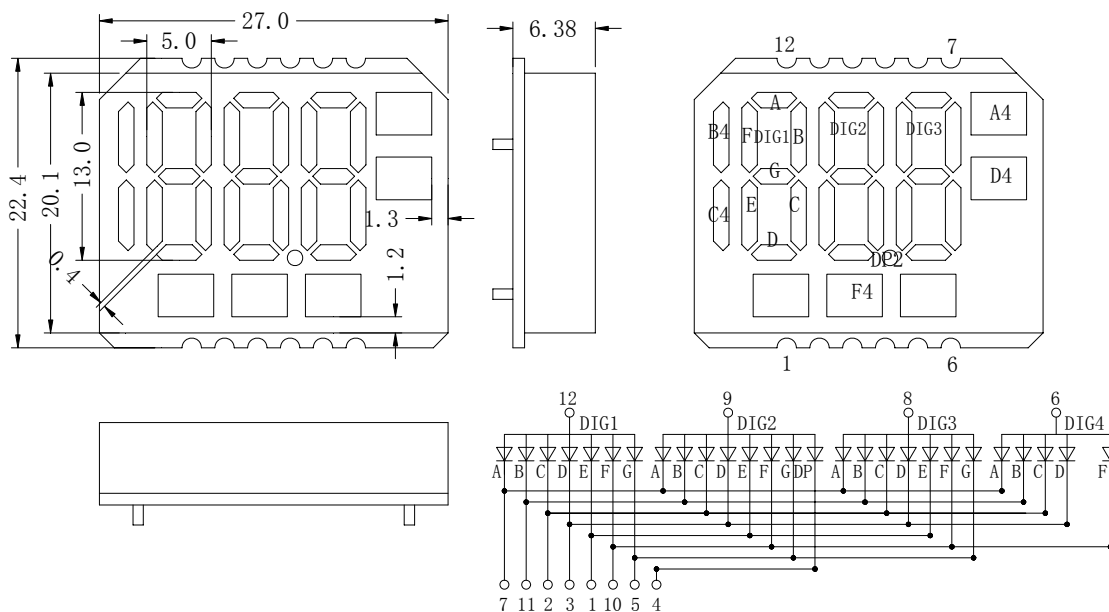

面膜尺寸效果图:



高度尺寸公差: ±0.1 mm, 未注尺寸公差为: ±0.2mm

客户:

确认人:

日期:



PART NO.: UL-2027BW

TYPICALELECTRO-OPTICALCHARACTERISTICSCURV

