



中山市晶艺光电科技有限公司  
ZHONGSHAN JEWELLY OPTOELECTRONIC TECHNOLOGY CO.,LTD.

# 样品承认书

品 名： 24\*50 共阳白色彩屏

规 格： UL-2450BW2

编 号： 2017-07

| 客户签字栏 |    |    |
|-------|----|----|
| 核准    | 审核 | 承认 |
|       |    |    |

| 本公司签字栏 |    |    |
|--------|----|----|
| 核准     | 审核 | 制作 |
|        |    |    |

地址：广东省中山市南区昌盛路4号

电话：0760-23886633 23886636 23886632

传真：0760-23886658

网址：[www.jlul.com](http://www.jlul.com)

电子邮箱：[jinglei@jlul.com](mailto:jinglei@jlul.com)



PART NO.: UL-2450BW2

ELECTRICAL AND OPTICAL CHARACTERISTICS(Ta=25°C).



| Parameter                | Symbol        | Min | Typ  | Max | Unit | Test Condition |
|--------------------------|---------------|-----|------|-----|------|----------------|
| Wave Length              | $\lambda P$   | --- | ---  | --- | nm   | IF=20mA(Note1) |
| Chromaticity Coordinates | X             | --- | ---  | --- | ---  | IF=20mA        |
|                          | Y             | --- | ---  | --- |      | IF=20mA        |
| Luminous Intensity       | $\phi$        | --- | 2.2  | --- | LM   | IF=20mA        |
| Viewing Angle            | $2\theta 1/2$ | --  | ---- | --  | Deg  | IF=20mA        |
| Forward voltage          | VF            | 2.6 | 3.0  | 3.8 | V    | IF=20mA        |

Remark:Viewing angle is the Off-axis angle at which the luminous intensity is half the axial luminous intensity.

ABSOLUTE MAXIMUN RATINGS(Ta=25°C)

Reverse Voltage.....5V  
 Reverse Current(V<sub>R</sub>=5V).....20 μ A  
 Operating Temperature Range.....-25°C~+80°C  
 Storage Temperature Range.....-30°C~+80°C  
 Lead Soldering Temperature..... 260°C For 5 Seconds

PACKAGE DIMENSION:

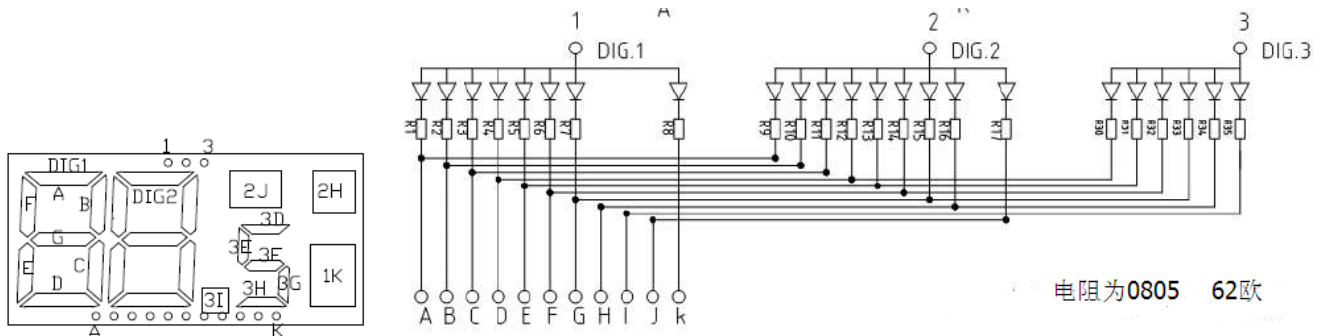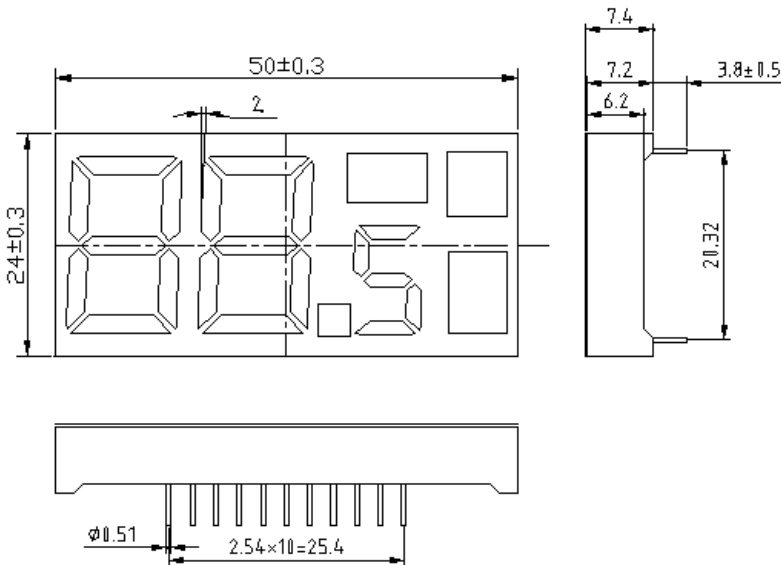

注：未标注尺寸公差为：±0.2

客户名称：

工程确认：

日期：



PART NO.: UL-2450BW2

TYPICAL ELECTRO-OPTICAL CHARACTERISTICS CURVE:

