



中山市晶艺光电科技有限公司
ZHONGSHAN JEWELLY OPTOELECTRONIC TECHNOLOGY CO.,LTD.

样品承认书

品名: 28*33 黄色共阴彩屏

规格: UL-2833AY6

编号: 2017-07

客户签字栏		
核准	审核	承认

本公司签字栏		
核准	审核	制作

地址: 广东省中山市南区昌盛路4号

电话: 0760-23886633 23886636 23886632

传真: 0760-23886658

网址: www.jlul.com

电子邮箱: jinglei@jlul.com



PART NO.: UL-2833AY6

■ ELECTRICAL AND OPTICAL CHARACTERISTICS(Ta=25°C)

Chip		Lens Appearance	Absolute Maximum				Electro-optical Data(AT20mA)			
Emitted	Peak Wave Length		$\Delta \lambda$ (nm)	Pd (mW)	If (mA)	Peak (mA)	Vf (V)			IV (mcd)
							Min	Mean	Max	Typ.
Yellow	586-590	White Diff.	20	35	20	60	1.7	2.0	2.5	82-88



Remark:Viewing angle is the Off-axis angle at which the luminous intensity is half the axial luminous intensity.

ABSOLUTE MAXIMUM RATINGS(Ta=25°C)

Reverse Voltage.....5V
 Reverse Current($V_R=5V$).....20 μ A
 Operating Temperature Range.....-25°C~+80°C
 Storage Temperature Range.....-30°C~+80°C
 Lead Soldering Temperature..... 260°C For 5 Seconds

PACKAGE DIMENSION:

■ PACKAGE DIMENSION:

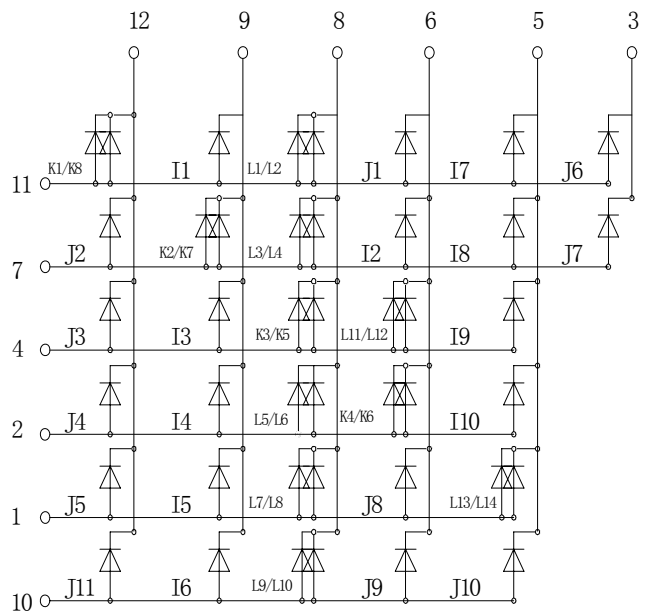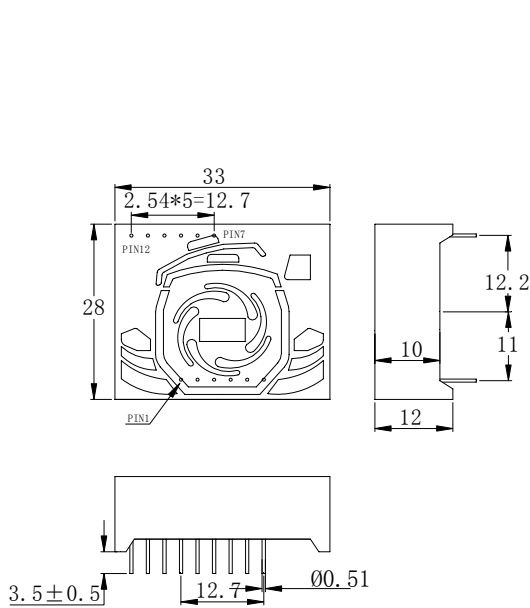

未注尺寸公差为: ±0.2mm

客户名称:

工程确认:

日期:



PART NO.: UL-2833AY6

TYPICAL ELECTRO-OPTICAL CHARACTERISTICS CURVE:

