



中山市晶艺光电科技有限公司
ZHONGSHAN JEWELRY OPTOELECTRONIC TECHNOLOGY CO.,LTD.

样品承认书

品名： 数码管 70*35 共阳彩屏

规格： UL-3570BROYG

编号： 2017-07

客户签字栏		
核准	审核	承认

本公司签字栏		
核准	审核	制作

地址：广东省中山市南区昌盛路4号

电话：0760-23886633 23886636 23886632

传真：0760-23886658

网址：www.jlul.com

电子邮箱：jinglei@jlul.com



中山市晶艺光电科技有限公司

ZHONGSHAN JEWELRY OPTOELECTRONIC TECHNOLOGY CO.,LTD.

PART NO.: UL-3570BROYG

ELECTRICAL AND OPTICAL CHARACTERISTICS(Ta=25°C)


Chip		Lens Appearance	Absolute Maximum				Electro-optical Data(AT20mA)			
Emitted	Peak Wave Length		$\Delta \lambda$ (nm)	Pd (mW)	If (mA)	Peak (mA)	Vf (V)			IV (mcd)
							Min	Typ	Max	Typ.
Red	630-633	White Diff.	20	80	20	100	1.7	2.0	2.5	30-35
Orange	570-572	White Diff.	20	80	20	100	1.7	2.0	2.5	80-90
Yellow	585-590	White Diff.	20	80	20	100	1.7	2.0	2.5	60-70
Green	570-572	White Diff.	20	80	20	100	1.7	2.0	2.5	30-37

Remark: Viewing angle is the Off-axis angle at which the luminous intensity is half the axial luminous intensity.


ABSOLUTE MAXIMUM RATINGS(Ta=25°C)

- Reverse Voltage.....5V
- Reverse Current(V_R=5V).....20 μ A
- Operating Temperature Range.....-25°C~+80°C
- Storage Temperature Range.....-30°C~+80°C AA
- Lead Soldering Temperature..... 260°C For 5 Seconds

PACKAGE DIMENSION:

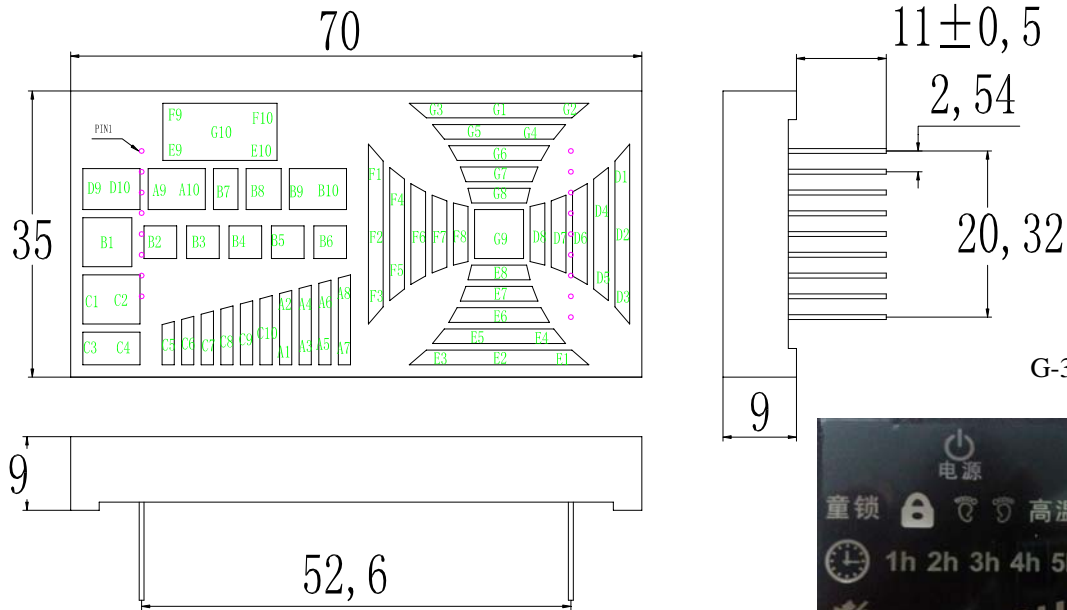

G-3570 面膜

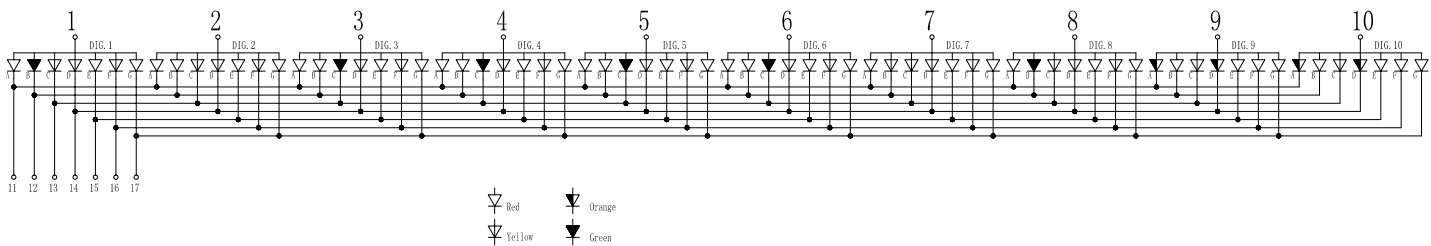

尺寸公差为: ±0.2mm

客户名称:

工程确认:






日期:



PART NO.: UL-3570BROYG

TYPICAL ELECTRO-OPTICAL CHARACTERISTICS CURVE:

RED:

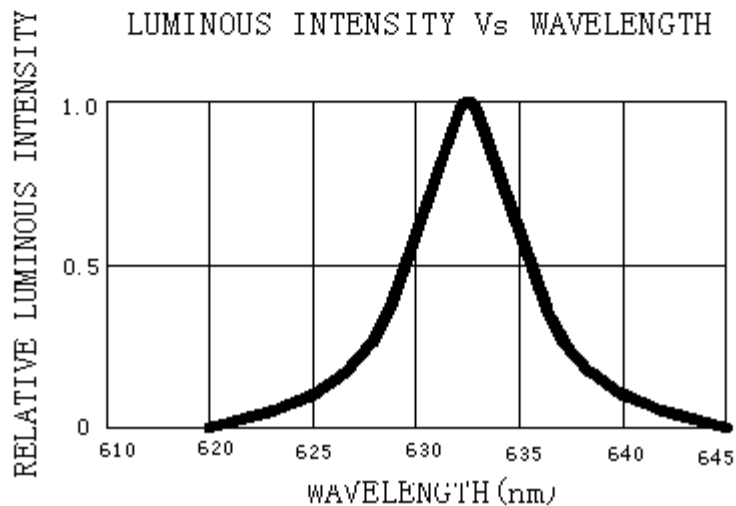
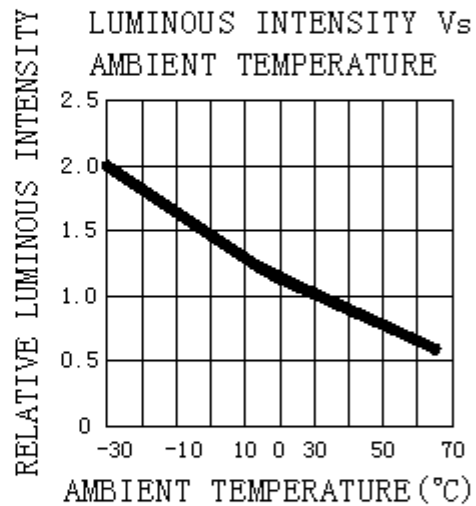
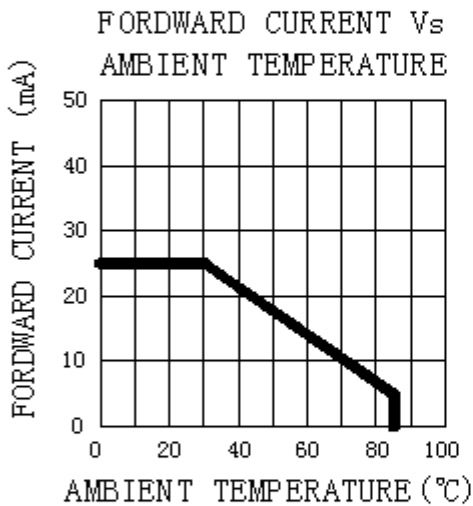
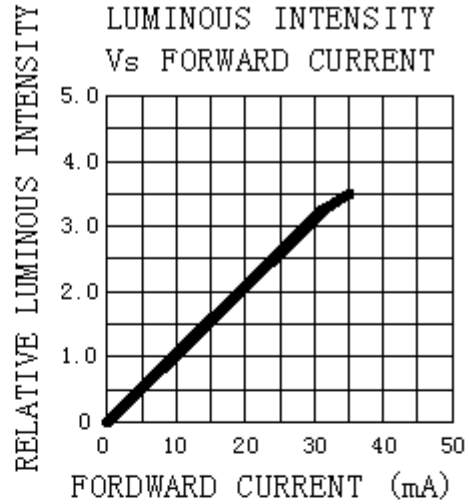
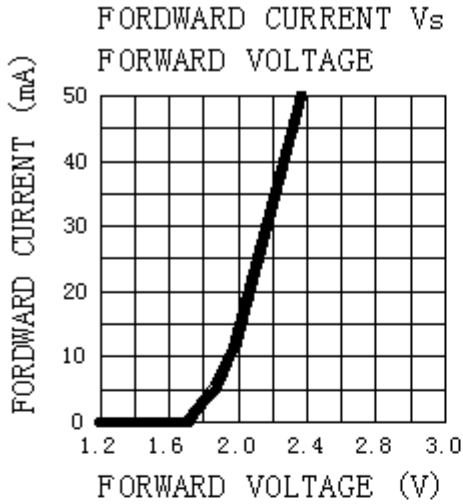




PART NO.: UL-3570BROYG

TYPICAL ELECTRO-OPTICAL CHARACTERISTICS CURVE:

Orange:

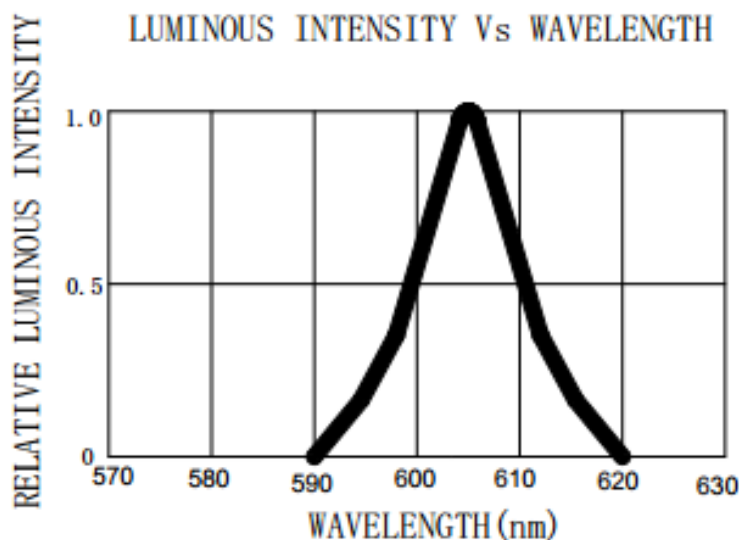
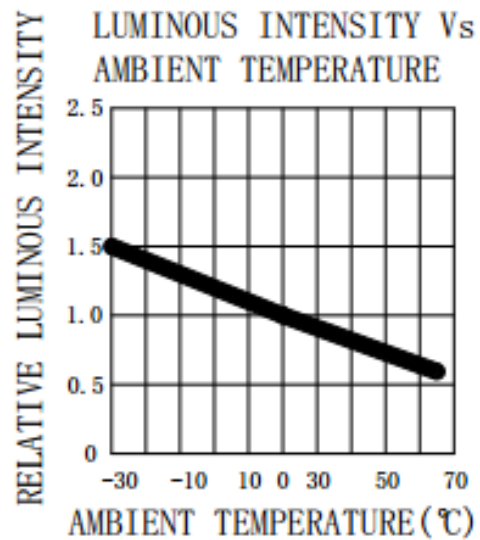
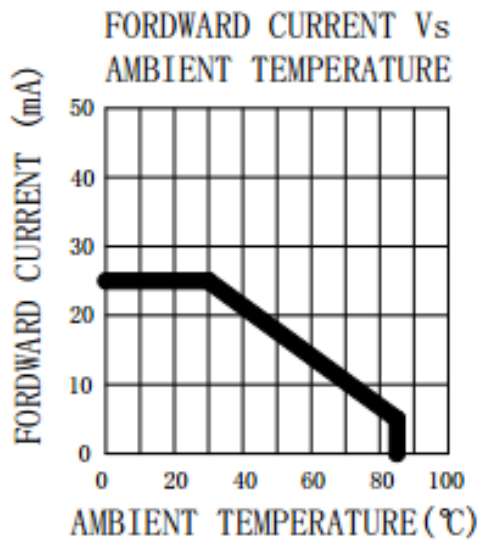
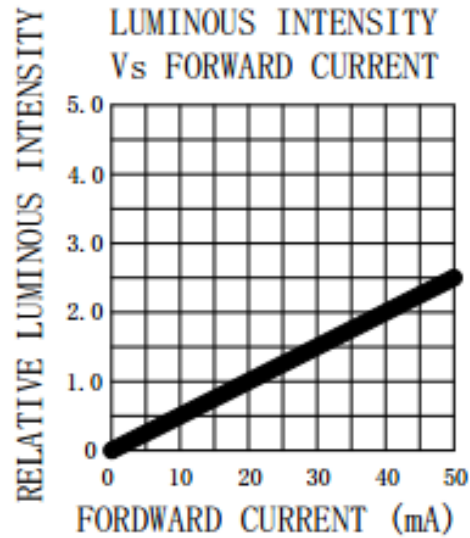
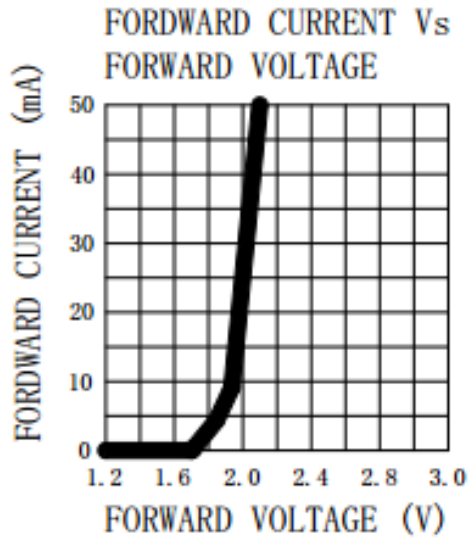




PART NO.: UL-3570BROYG

TYPICAL ELECTRO-OPTICAL CHARACTERISTICS CURVE:

Yellow:

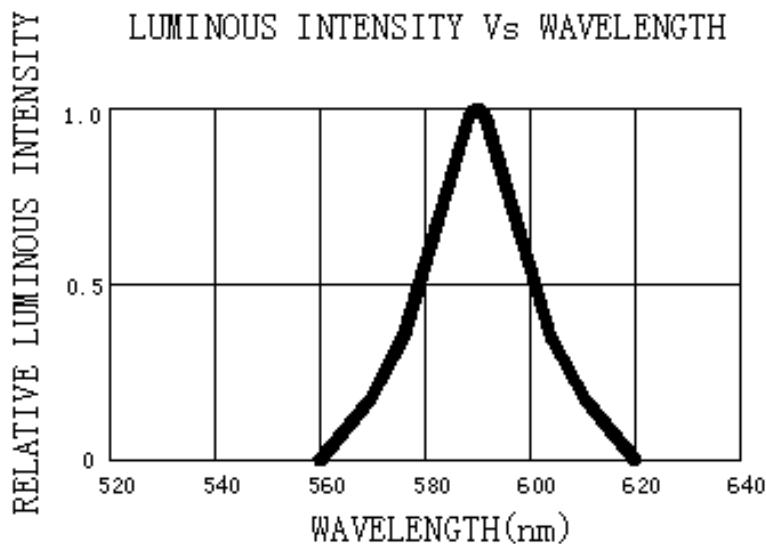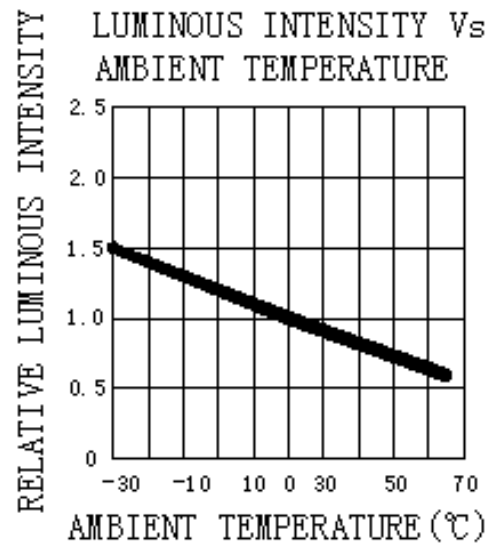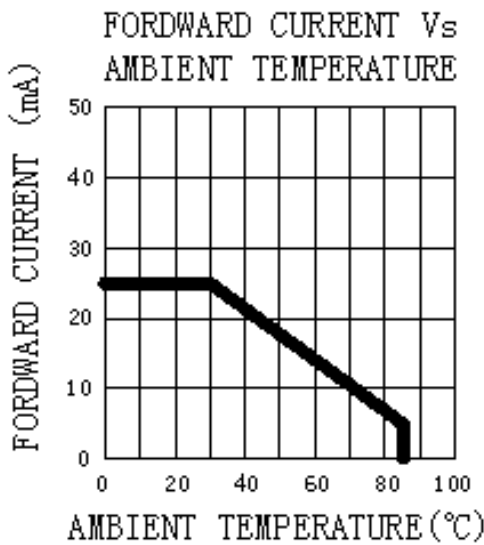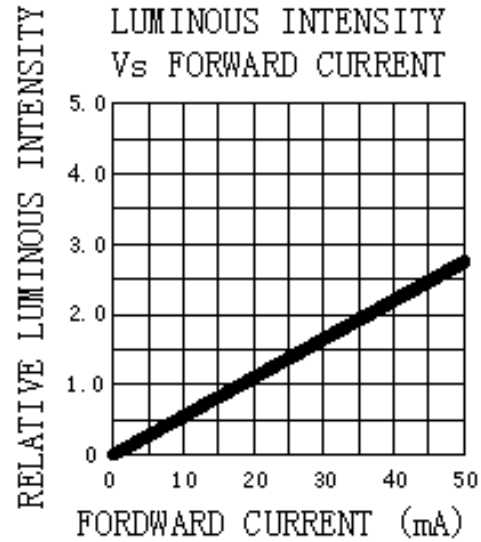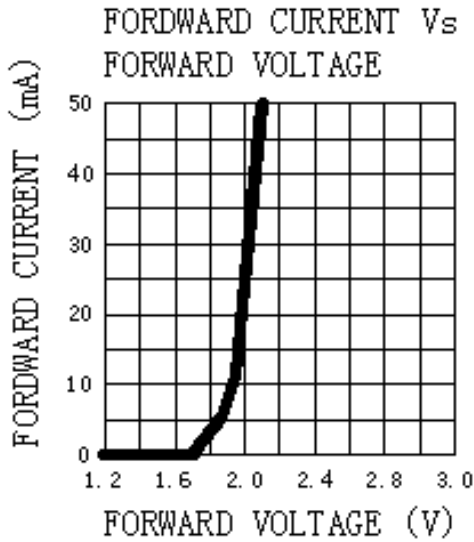



PART NO.: UL-3570BROYG

TYPICAL ELECTRO-OPTICAL CHARACTERISTICS CURVE:

Green:

