



中山市晶艺光电科技有限公司  
ZHONGSHAN JEWELLY OPTOELECTRONIC TECHNOLOGY CO.,LTD.

# 样品承认书

品名： 42\*95 共阳白色彩屏

规格： UL-4295BW

编号： 2017-07

客户签字栏		
核准	审核	承认

本公司签字栏		
核准	审核	制作

地址：广东省中山市南区昌盛路4号

电话：0760-23886633 23886636 23886632

传真：0760-23886658

网址：[www.jlul.com](http://www.jlul.com)

电子邮箱：[jinglei@jlul.com](mailto:jinglei@jlul.com)



PART NO.: UL-4295BW

■ ELECTRICAL AND OPTICAL CHARACTERISTICS(Ta=25°C)


Parameter	Symbol	Min	Typ	Max	Unit	Test Condition
Wave Length	$\lambda P$	---	---	---	nm	IF=20mA(Note1)
Chromaticity Coordinates	X	---	0.246	---	---	IF=20mA
	Y	---	0.267	---		IF=20mA
Luminous Intensity	IV	---	120-140	---	mcd	IF=20mA
Forward voltage	VF	2.6	3.0	3.8	V	IF=20mA

Remark: Viewing angle is the Off-axis angle at which the luminous intensity is half the axial luminous intensity.

■ ABSOLUTE MAXIMUM RATINGS(Ta=25°C)

Reverse Voltage.....5V  
 Reverse Current(V<sub>R</sub>=5V).....20 μ A  
 Operating Temperature Range.....-25°C~+80°C  
 Storage Temperature Range.....-30°C~+80°C  
 Lead Soldering Temperature.....260°C For 5 Seconds

■ PACKAGE DIMENSION:

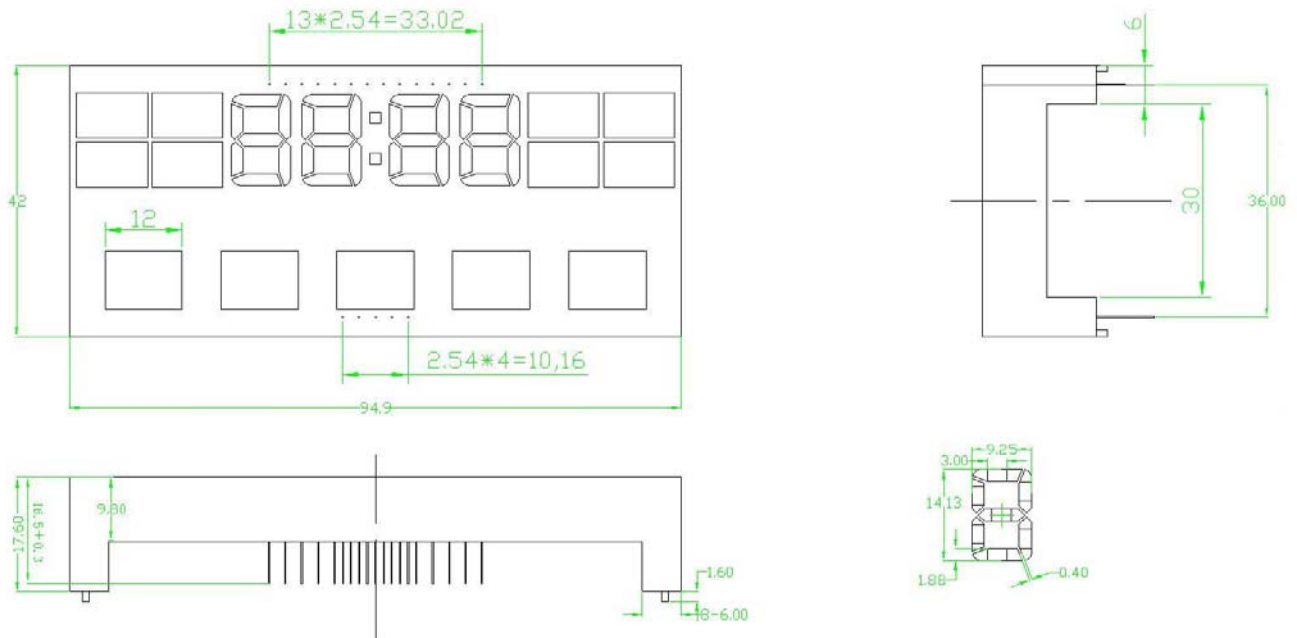

未注尺寸公差为: ±0.2mm



客户名称:

工程确认:


日期:



PART NO.: UL-4295BW

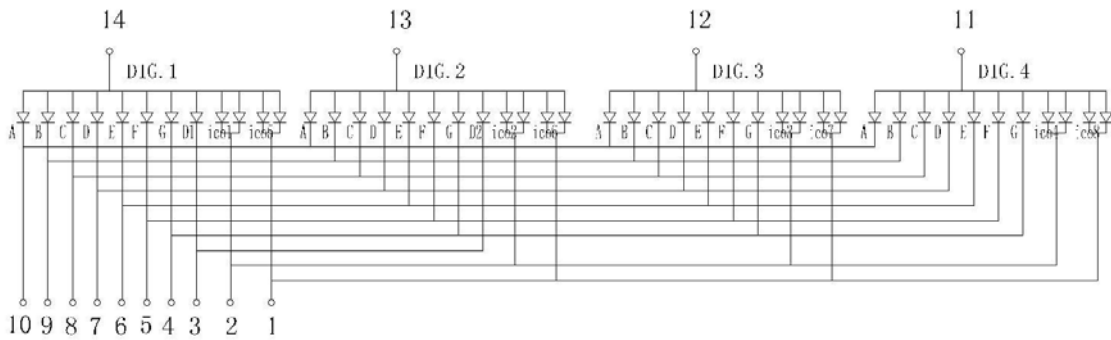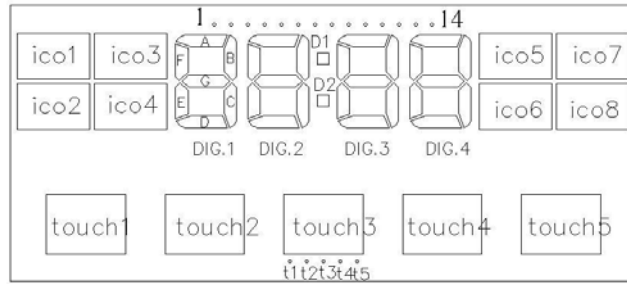

面膜效果待定，图案仅供参考

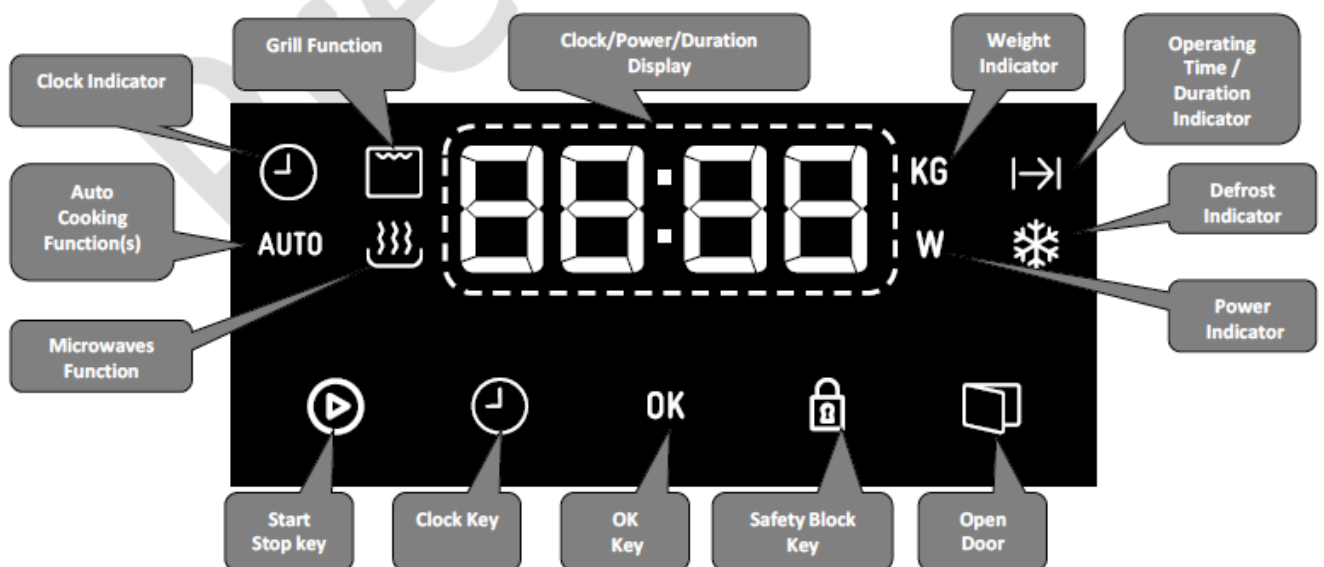

客户名称:

工程确认:

日期:



PART NO.: UL-4295BW

TYPICAL ELECTRO-OPTICAL CHARACTERISTICS CURVE:

White:

