



中山市晶艺光电科技有限公司  
ZHONGSHAN JEWELLY OPTOELECTRONIC TECHNOLOGY CO.,LTD.

# 样品承认书

品名： 30\*70 共阳白色彩屏

规格： UL-7030BW

编号： 2017-07

客户签字栏		
核准	审核	承认

本公司签字栏		
核准	审核	制作

地址：广东省中山市南区昌盛路4号

电话：0760-23886633 23886636 23886632

传真：0760-23886658

网址：[www.jlul.com](http://www.jlul.com)

电子邮箱：[jinglei@jlul.com](mailto:jinglei@jlul.com)



PART NO.: UL-7030BW

■ ELECTRICAL AND OPTICAL CHARACTERISTICS(Ta=25°C)

Parameter	Symbol	Min	Typ	Max	Unit	Test Condition
Wave Length	$\lambda P$	452.5	453.7	455	nm	IF=20mA(Note1)
Chromaticity Coordinates	X	0.2912	0.3013	0.3113	---	IF=20mA
	Y	0.3108	0.3208	0.3305		IF=20mA
Luminous Intensity	IV	65	67	69	mw	IF=20mA
Forward voltage	VF	2.6	3.0	3.8	V	IF=20mA


相关色温: 7259K

Remark: Viewing angle is the Off-axis angle at which the luminous intensity is half the axial luminous intensity.

■ ABSOLUTE MAXIMUM RATINGS(Ta=25°C)

- Reverse Voltage.....5V
- Reverse Current(V<sub>R</sub>=5V).....20  $\mu$  A
- Operating Temperature Range.....-25°C~+80°C
- Storage Temperature Range.....-30°C~+80°C
- Lead Soldering Temperature.....260°C For 5 Seconds

■ PACKAGE DIMENSION:

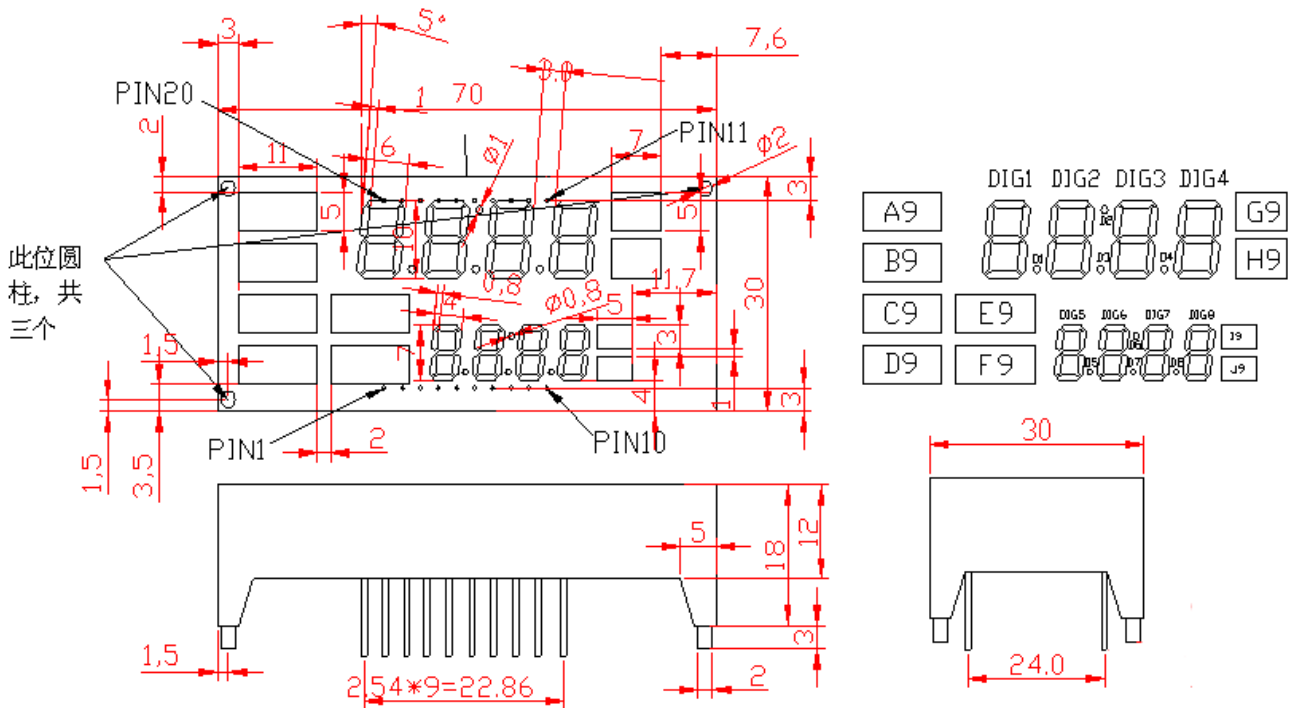

高度尺寸不涵盖面膜尺寸, 未注尺寸公差为:  $\pm 0.2\text{mm}$

客户名称:



工程确认:

日期:



PART NO.: UL-7030BW

■ PACKAGE DIMENSION:

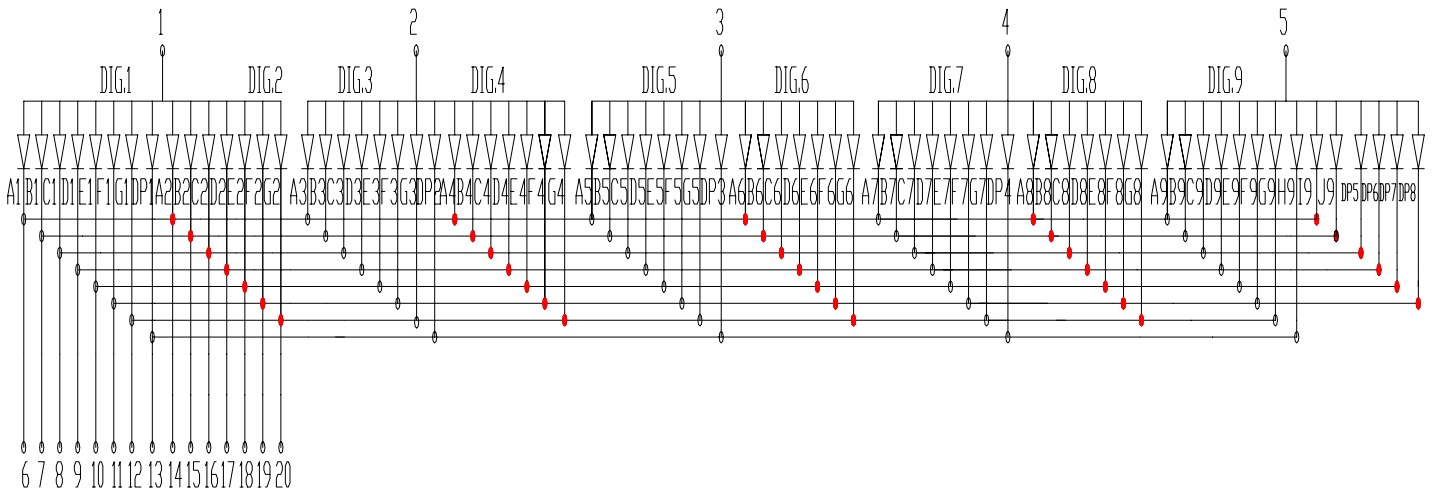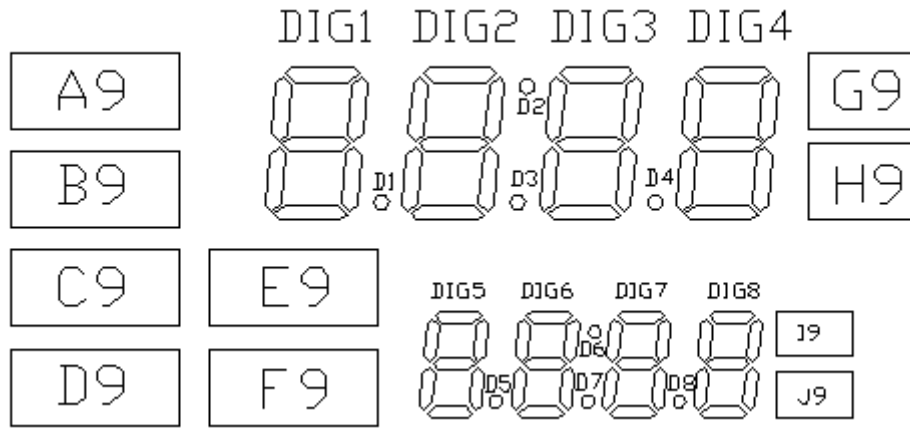

面膜:G-7030-2



客户名称:

工程确认:

日期:



PART NO.: UL-7030BW

TYPICAL ELECTRO-OPTICAL CHARACTERISTICS CURVE:

White:

