



中山市晶艺光电科技有限公司  
ZHONGSHAN JEWELLY OPTOELECTRONIC TECHNOLOGY CO.,LTD.

# 样品承认书

品名： 48\*103 共阳红白双色彩屏

规格： UL-48103BRW

编号： 2017-07

客户签字栏		
核准	审核	承认

本公司签字栏		
核准	审核	制作

地址：广东省中山市南区昌盛路4号

电话：0760-23886633 23886636 23886632

传真：0760-23886658

网址：[www.jlul.com](http://www.jlul.com)

电子邮箱：[jinglei@jlul.com](mailto:jinglei@jlul.com)



PART NO.: UL-48103BRW

■ ELECTRICAL AND OPTICAL CHARACTERISTICS(Ta=25°C)


Chip		Lens Appearance	Absolute Maximum				Electro-optical Data(AT20mA)			
Emitted	Peak Wave Length		$\Delta \lambda$ (nm)	Pd (mW)	If (mA)	Peak (mA)	Vf (V)			IV (mcd)
							Min	Typ.	Max	Typ.
Red	630-635	White Diff.	20	35	20	60	1.7	2.0	2.5	30-35
White	-----	White Diff	20	60	20	60	2.6	3.0	3.8	26-27mw

Remark: Viewing angle is the Off-axis angle at which the luminous intensity is half the axial luminous intensity.

■ ABSOLUTE MAXIMUM RATINGS(Ta=25°C)

Reverse Voltage.....5V  
 Reverse Current( $V_R=5V$ ).....20  $\mu$  A  
 Operating Temperature Range.....-25°C~+80°C  
 Storage Temperature Range.....-30°C~+80°C  
 Lead Soldering Temperature..... 260°C For 5 Seconds

■ PACKAGE DIMENSION:

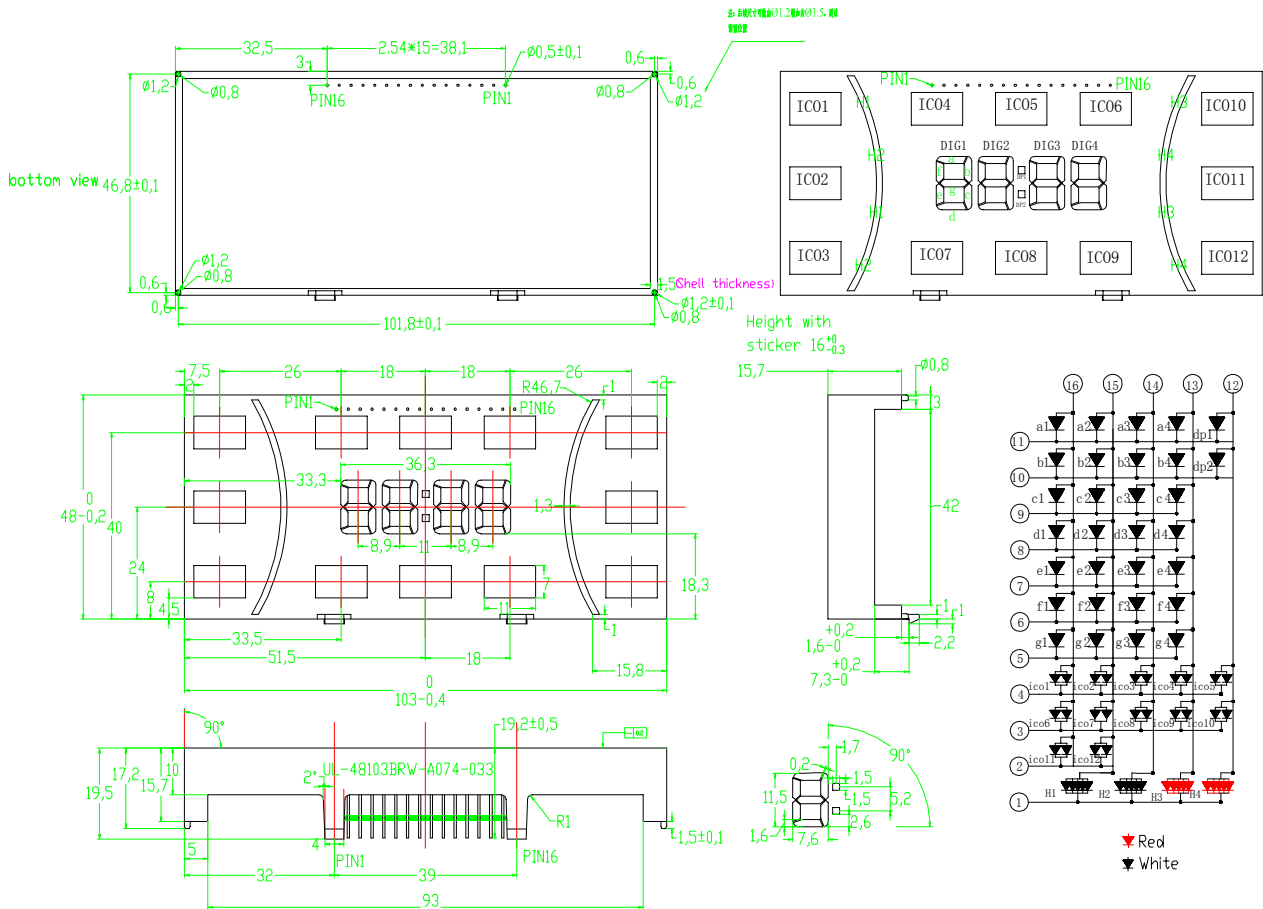

未注尺寸公差为: ±0.2mm



客户名称:

工程确认:

日期:




PART NO.: UL-48103BRW

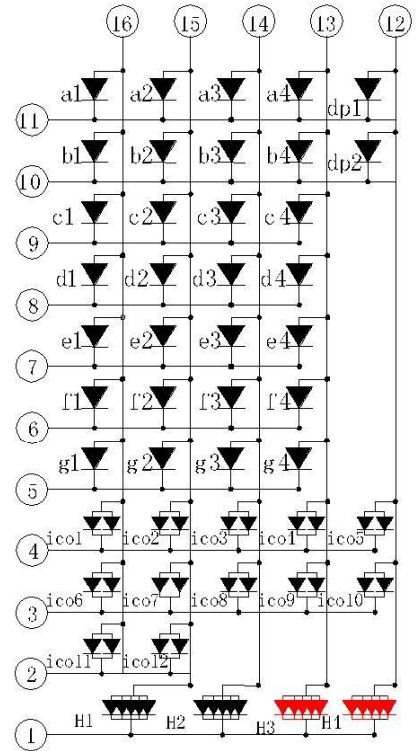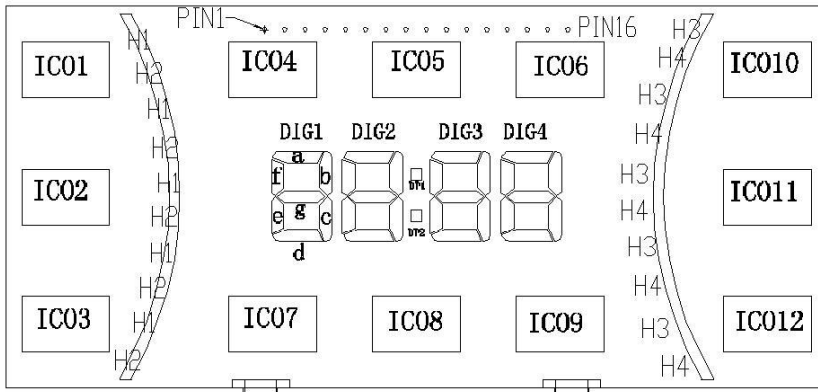

▼ Red  
▼ White

面膜图案:G-C48103-032

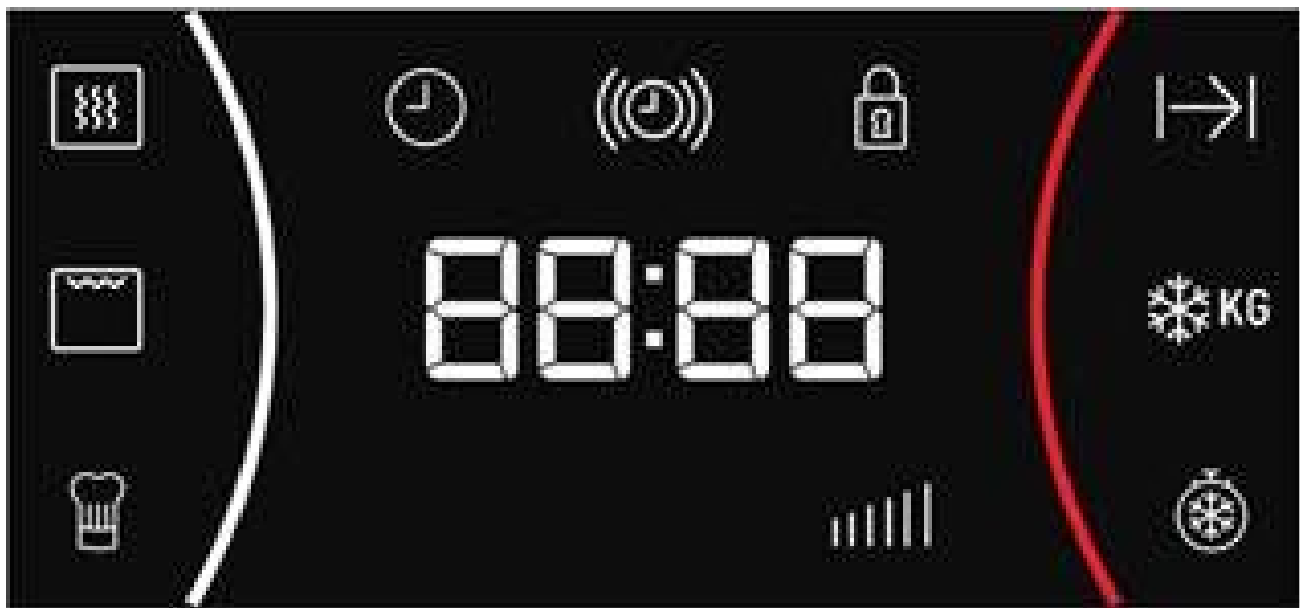

客户名称:

工程确认:






日期:



PART NO.: UL-48103BRW

TYPICAL ELECTRO-OPTICAL CHARACTERISTICS CURVE:

RED:

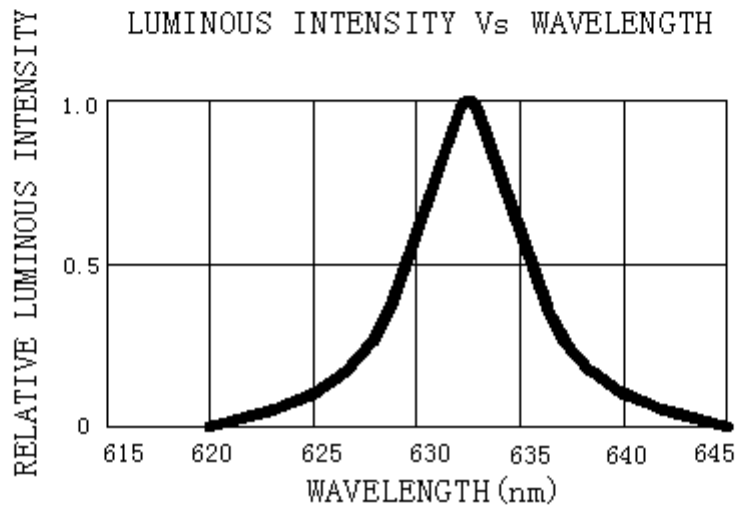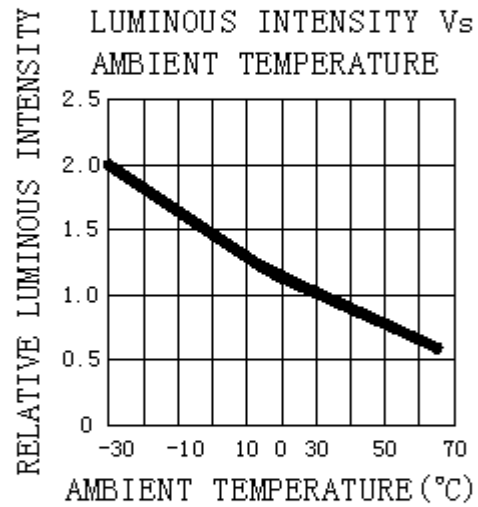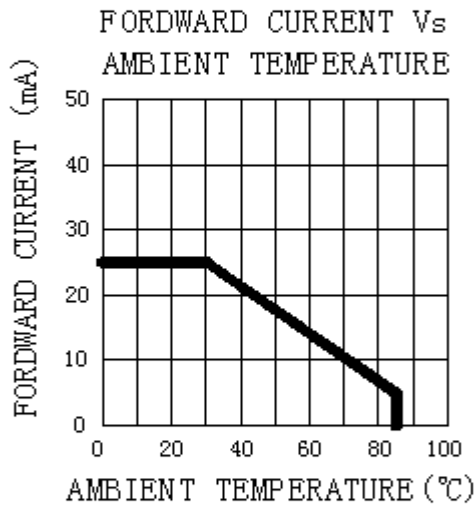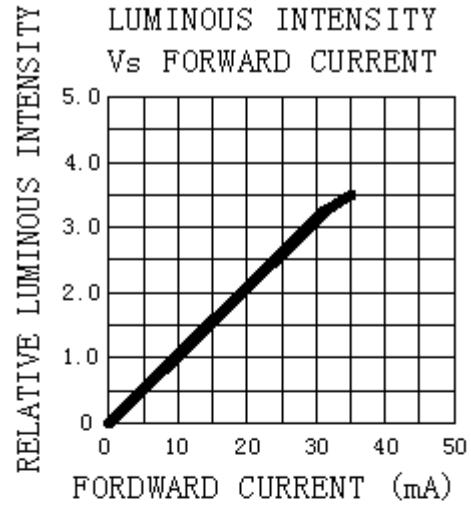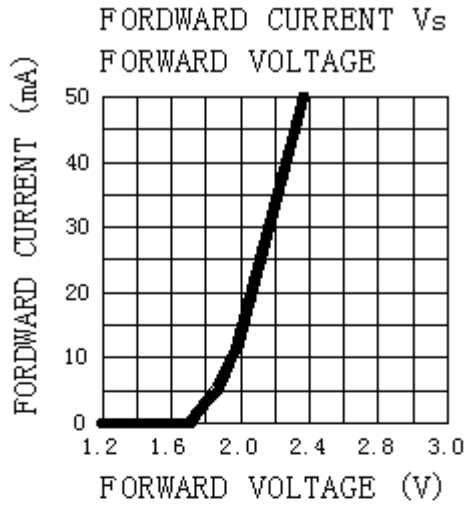



PART NO.: UL-48103BRW

TYPICAL ELECTRO-OPTICAL CHARACTERISTICS CURVE:

White:

