



中山市晶艺光电科技有限公司
ZHONGSHAN JEWELLY OPTOELECTRONIC TECHNOLOGY CO.,LTD.

样品承认书

品名： 59105 共阴白色彩屏

规格： UL-59105AW

编号： 2017-07

客户签字栏		
核准	审核	承认

本公司签字栏		
核准	审核	制作

地址：广东省中山市南区昌盛路4号

电话：0760-3886633 3886636 3886632

传真：0760-3886658

网址：www.jlul.com

电子邮箱：jinglei@jlul.com



中山市晶艺光电科技有限公司

ZHONGSHAN JEWELRY OPTOELECTRONIC TECHNOLOGY CO.,LTD.

■ PART NO.: UL-59105AW

■ ELECTRICAL AND OPTICAL CHARACTERISTICS(Ta=25°C)

Chip		Lens Appearance	Absolute Maximum				Electro-optical Data(AT20mA)			
Emitted	Peak Wave Length		$\Delta \lambda$ (nm)	Pd (mW)	If (mA)	Peak (mA)	Vf (V)			IV (mcd)
							Min	Typ	Max	Typ.
BLUE	452.5-455	White Diff.	30	60	20	60	2.6	3.1	3.4	26-27

Remark: Viewing angle is the Off-axis angle at which the luminous intensity is half the axial luminous intensity.

Reverse Voltage.....5V


Reverse Current(V_R=5V).....20 μ A

Operating Temperature Range.....-25°C~+80°C

Storage Temperature Range.....-30°C~+80°C

Lead Soldering Temperature..... 260°C For 5 Seconds

PACKAGE DIMENSION:

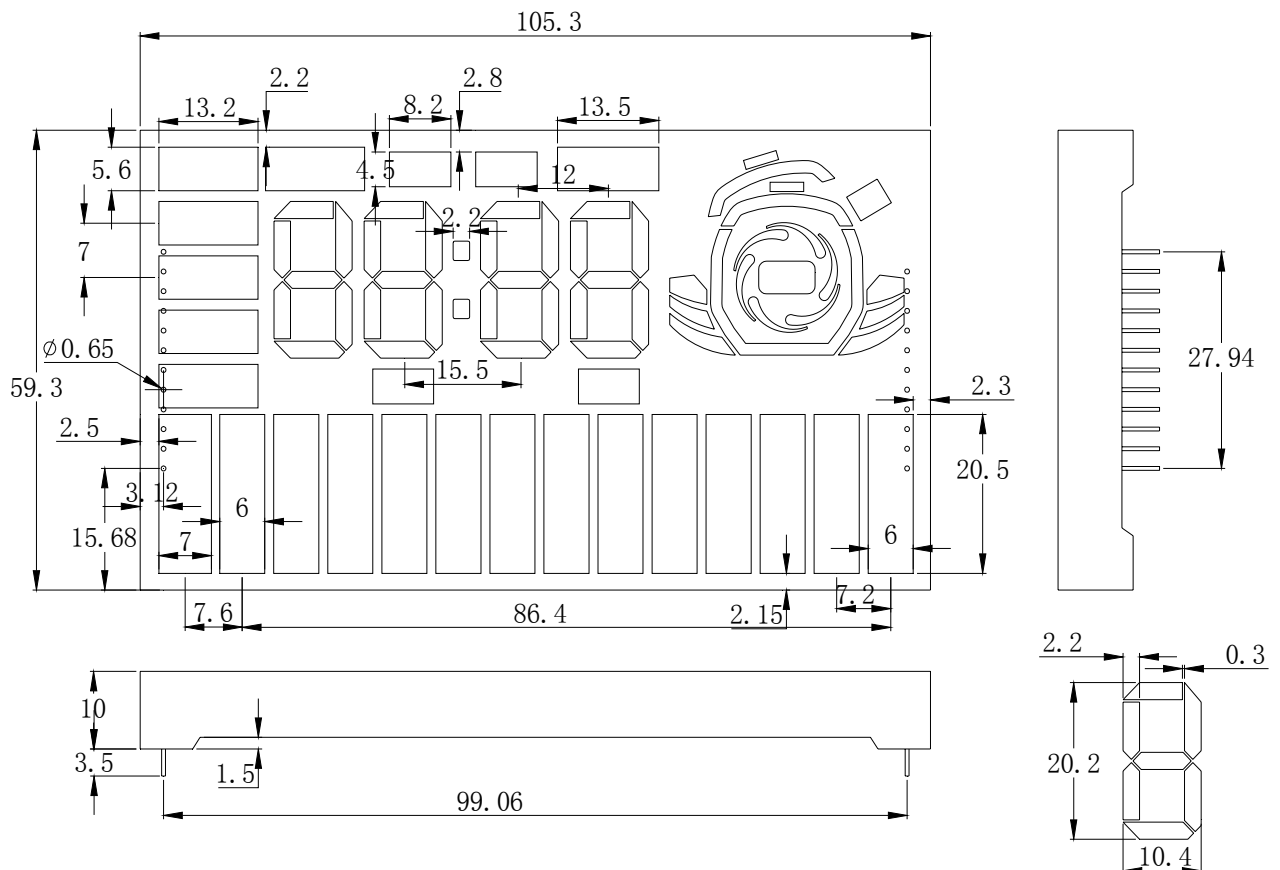

未标注尺寸公差±0.2mm

客户:

确认人:



日期:



中山市晶艺光电科技有限公司

ZHONGSHAN JEWELRY OPTOELECTRONIC TECHNOLOGY CO., LTD.

■ PART NO.: UL-59105AW

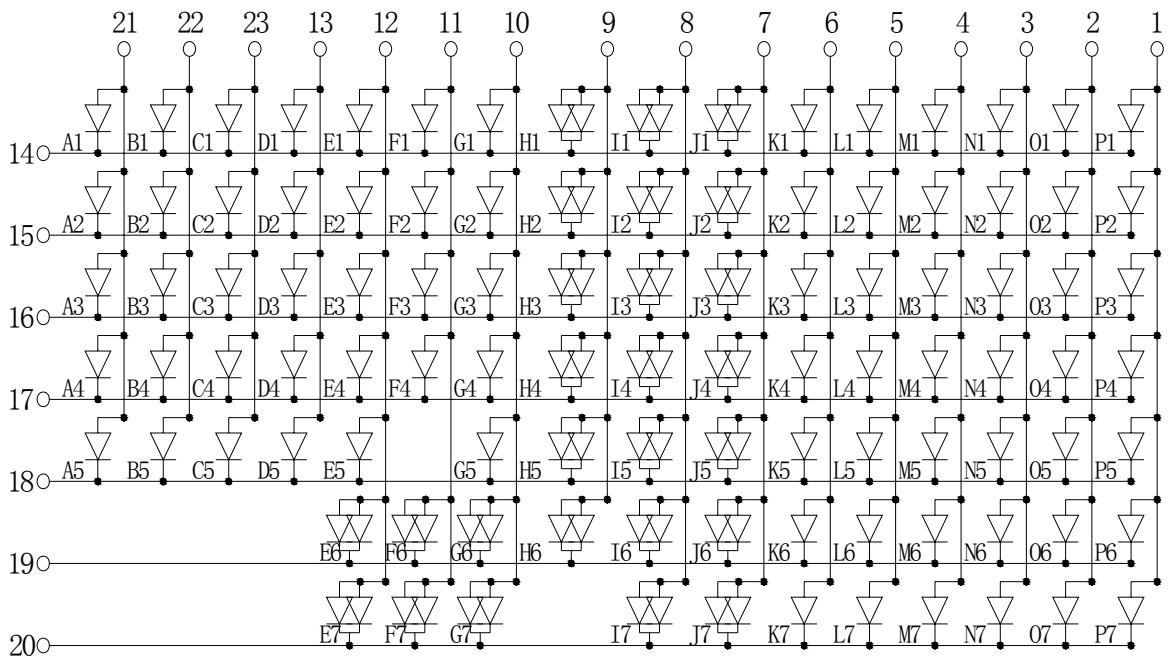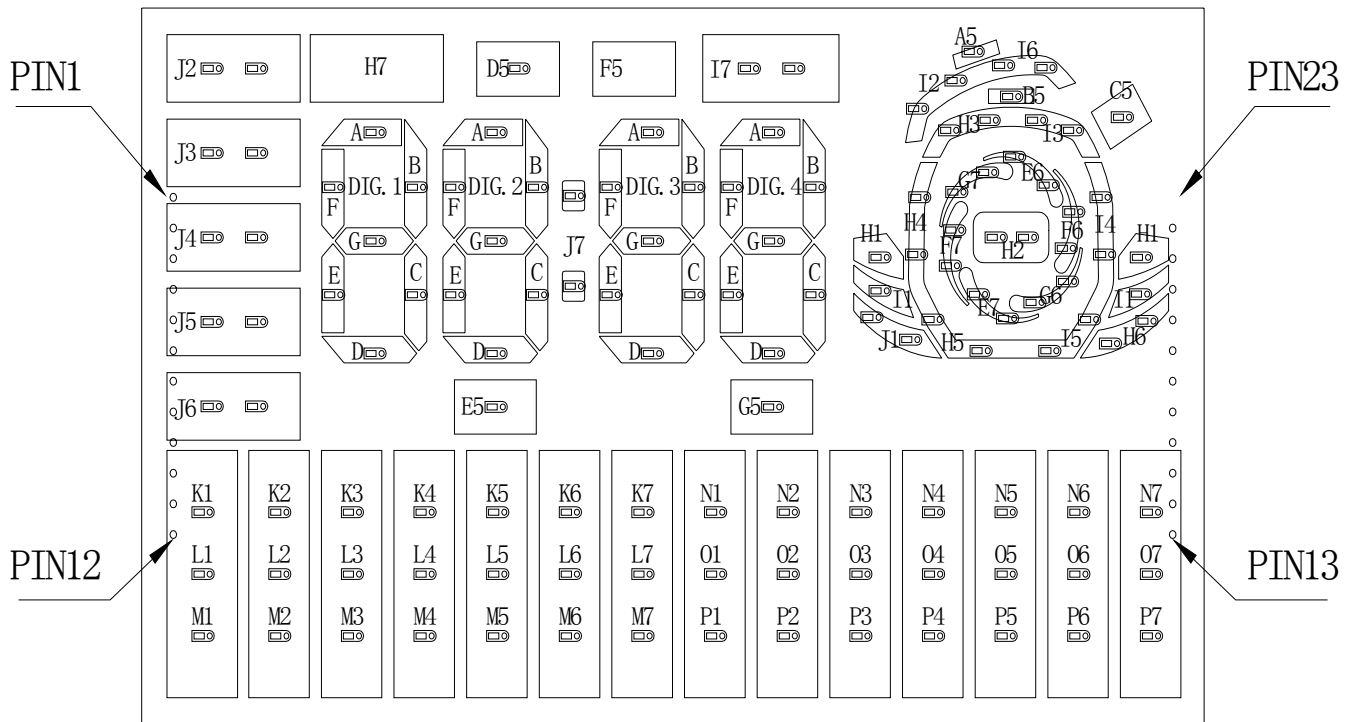

未标注尺寸公差±0.2mm

客户:

确认人:

日期:



■PART NO.: UL-59105AW

TYPICAL ELECTRO-OPTICAL CHARACTERISTICS CURVE:

