



中山市晶艺光电科技有限公司  
ZHONGSHAN JEWELLY OPTOELECTRONIC TECHNOLOGY CO.,LTD.

# 样品承认书

品名: 140\*70 共阳四色彩屏

规格: UL-70140DRYUGW

编号: 2017-07

客户签字栏		
核准	审核	承认

本公司签字栏		
核准	审核	制作

地址: 广东省中山市南区昌盛路 4 号

电话: 0760-23886633 23886636 23886632

传真: 0760-23886658

网址: [www.jlul.com](http://www.jlul.com)

电子邮箱: [jinglei@jlul.com](mailto:jinglei@jlul.com)



# 中山市晶艺光电科技有限公司

## ZHONGSHAN JEWELLY OPTOELECTRONIC TECHNOLOGY CO.,LTD.

PART NO.: UL-70140DRYUGW

ELECTRICAL AND OPTICAL CHARACTERISTICS(Ta=25°C)

Chip		Lens Appearance	Absolute Maximum				Electro-optical Data(AT20mA)			
Emitted	Peak Wave Length		$\Delta \lambda$ (nm)	Pd (mW)	If (mA)	Peak (mA)	Vf (V)			IV (mcd)
							Min	Typ	Max	Typ.
Red	618-625	White Diff.	20	35	20	60	1.7	2.0	2.5	29-32
Yellow	589-592	White Diff.	20	35	20	60	1.7	2.0	2.5	90-120
Green	568-569	White Diff.	20	60	20	60	2.6	3.0	3.8	517-520
White	C1	White Diff.	20	60	20	60	2.6	3.0	3.8	200-220

Remark: Viewing angle is the Off-axis angle at which the luminous intensity is half the axial luminous intensity.

ABSOLUTE MAXIMUM RATINGS(Ta=25°C)

Reverse Voltage.....5V


Reverse Current(V<sub>R</sub>=5V).....20  $\mu$  A

Operating Temperature Range.....-25°C~+80°C

Storage Temperature Range.....-30°C~+80°C AA

Lead Soldering Temperature..... 260°C For 5 Seconds

PACKAGE DIMENSION:

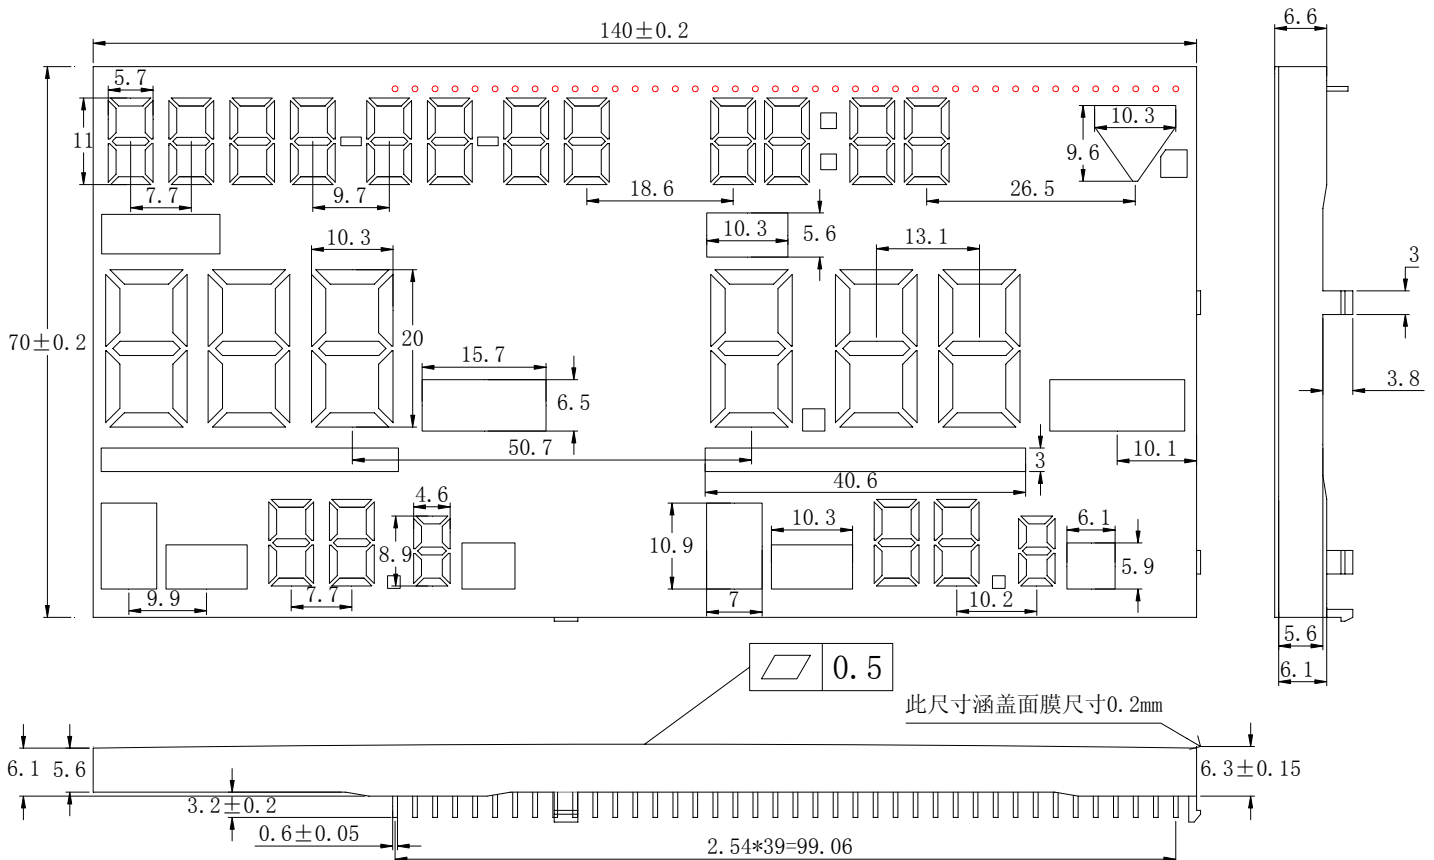

未标注尺寸公差为: ±0.2mm

客户名称:

工程确认:

日期:




# 中山市晶艺光电科技有限公司


## ZHONGSHAN JEWELLY OPTOELECTRONIC TECHNOLOGY CO.,LTD.

PART NO.: UL-70140DRYUGW

PACKAGE DIMENSION:

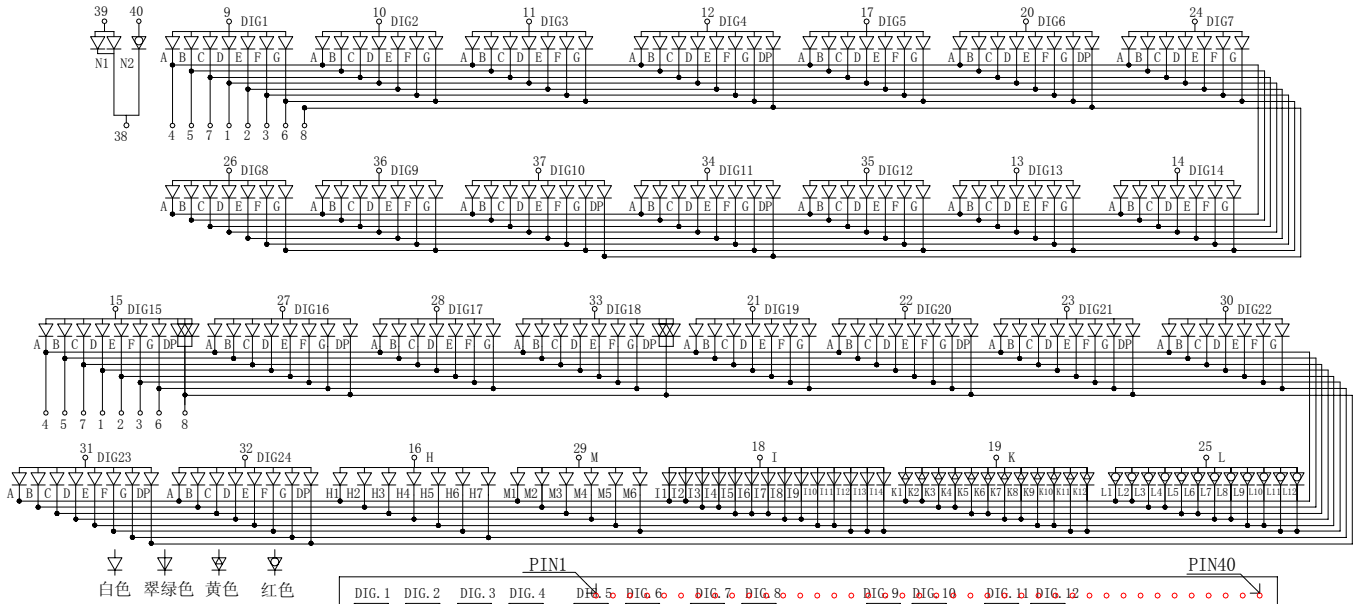

面膜效果图:

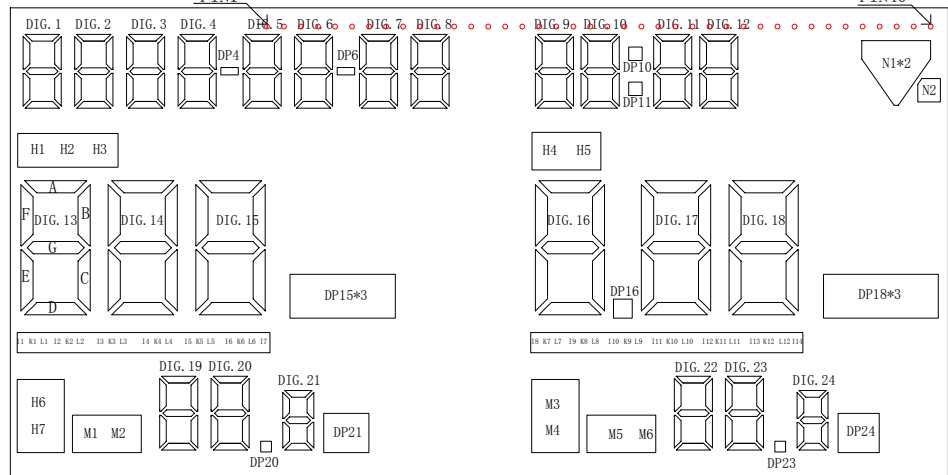

客户名称:

工程确认:






日期:



PART NO.: UL-70140DRYUGW

TYPICAL ELECTRO-OPTICAL CHARACTERISTICS CURVE:

RED:

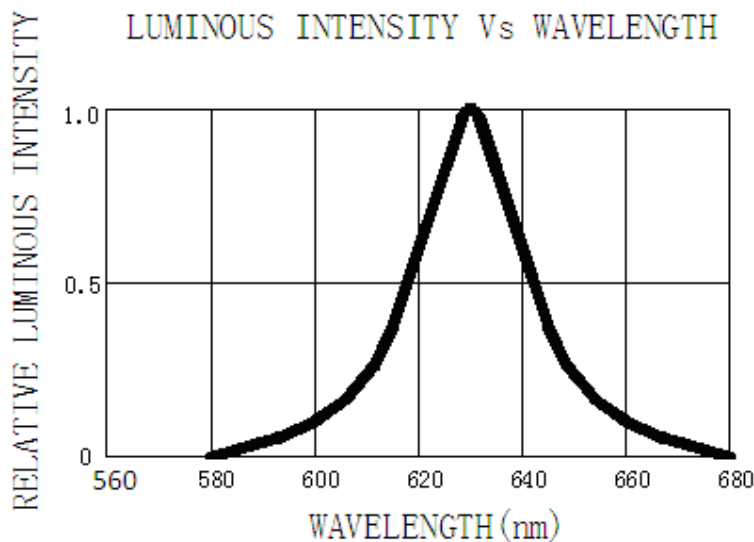
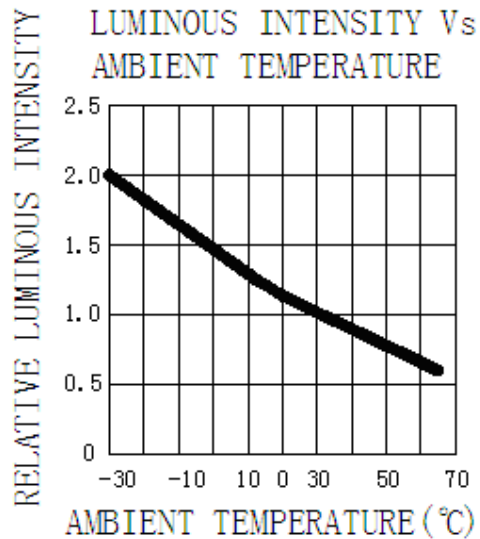
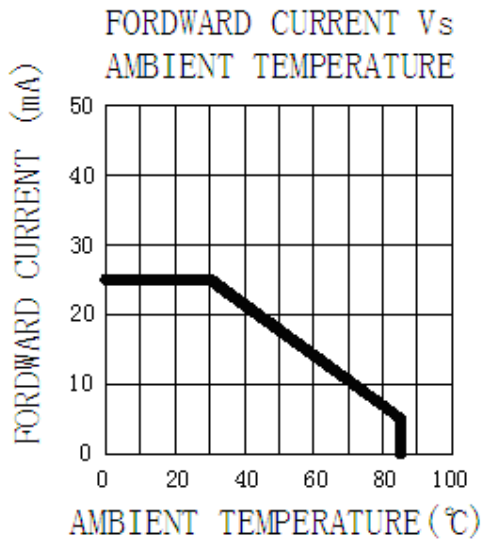
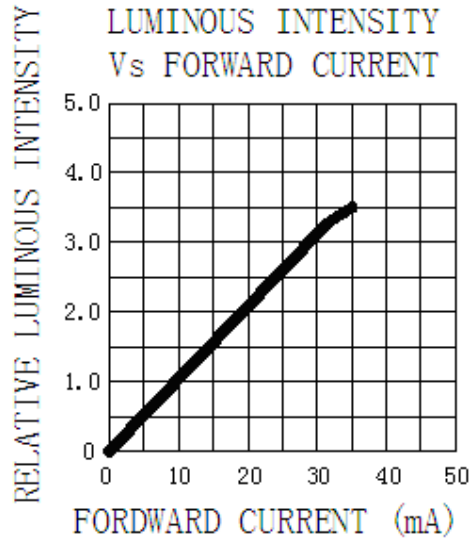
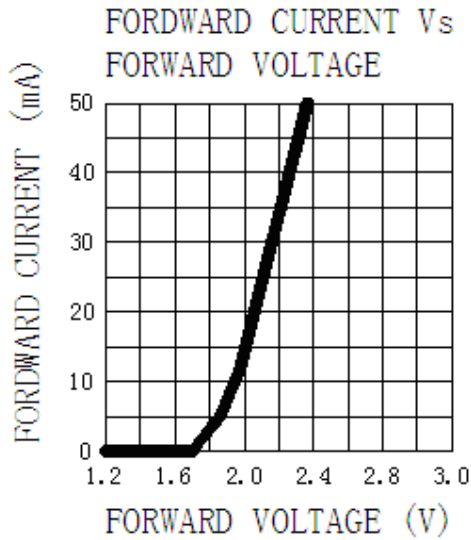




PART NO.: UL-70140DRYUGW

TYPICAL ELECTRO-OPTICAL CHARACTERISTICS CURVE:

Yellow:

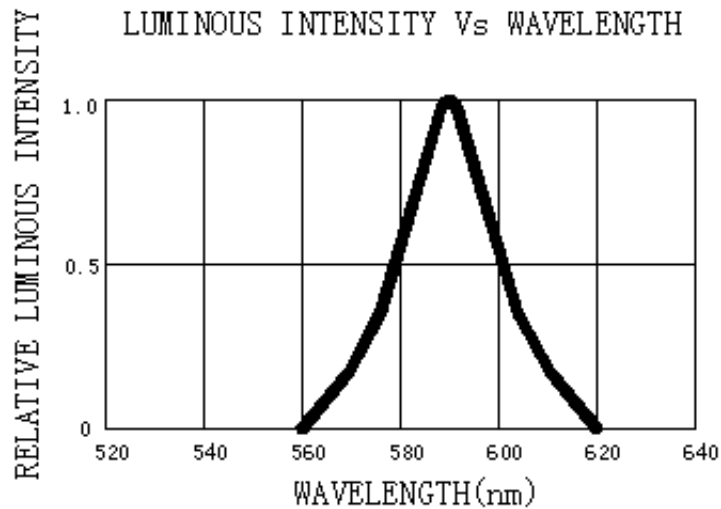
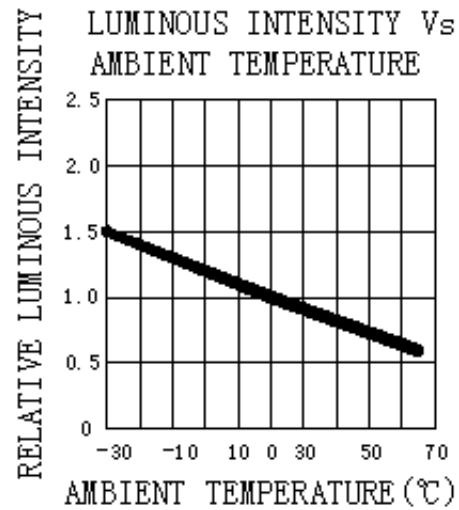
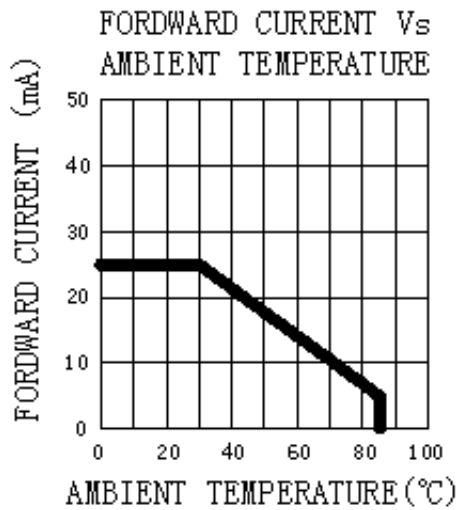
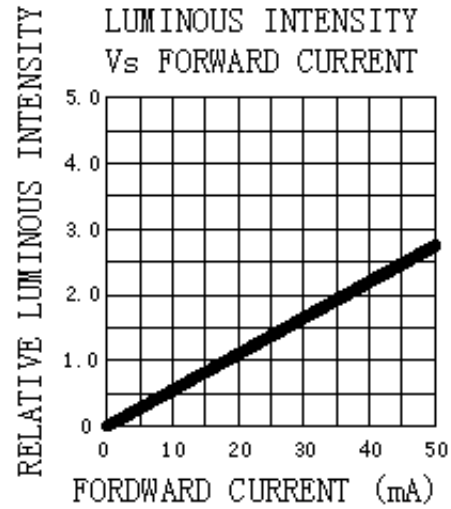
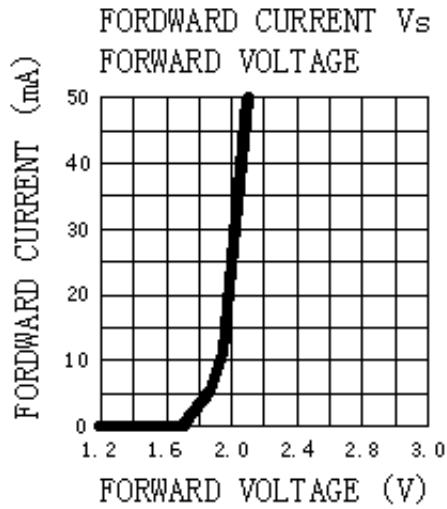




PART NO.: UL-70140DRYUGW

TYPICAL ELECTRO-OPTICAL CHARACTERISTICS CURVE:

Green:

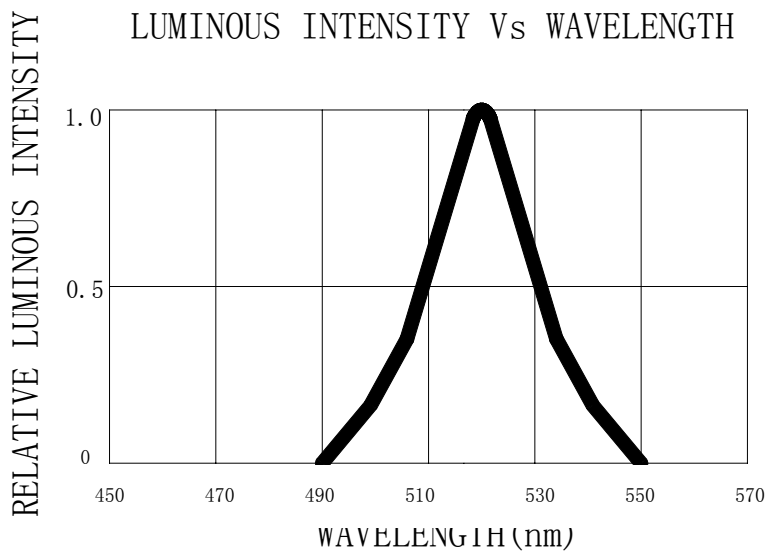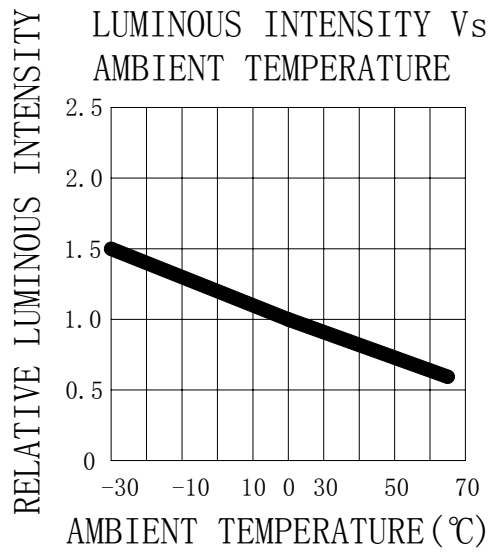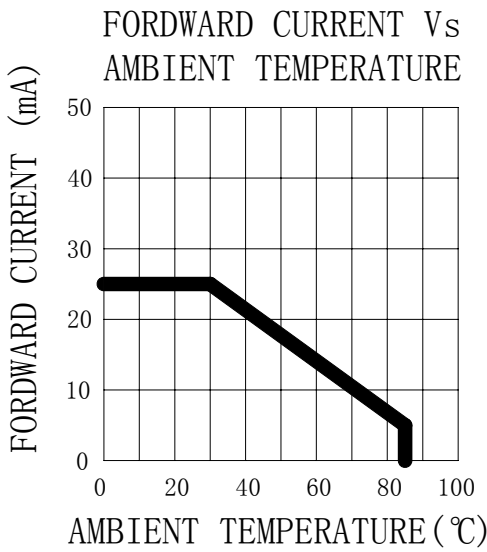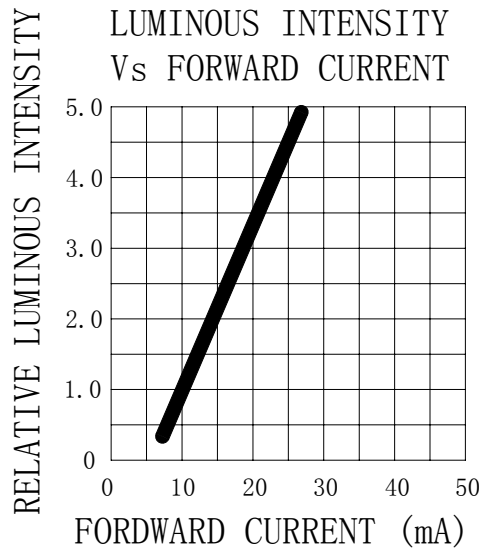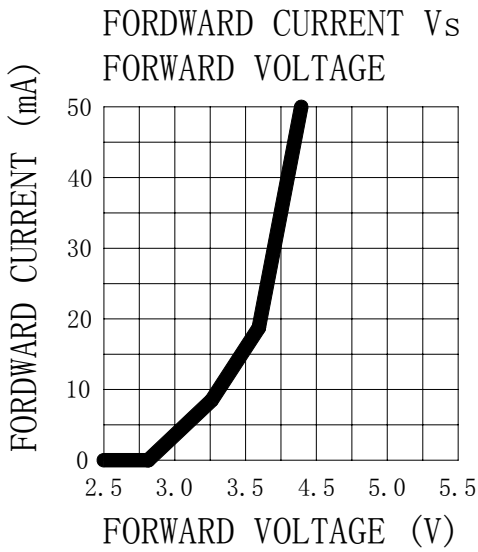



PART NO.: UL-70140DRYUGW

TYPICAL ELECTRO-OPTICAL CHARACTERISTICS CURVE:

White:

