

## Two Sided Applicator


### ■ Introduction:

Control the actual thickness of dry film or wet film by the precise test of coating. The coating with excellent consistency and repeatability is required when doing the coating opacity, wear-resistance, sag-resistance performance and other quality tests. Many standards ISO, GB, ASTM also require that coatings are in the same thickness. The thickness of coating can be smeared by applicator, that's the most common way to prepare the samples.



### ■ Technical Specification:

- ◆ High grade stainless steel
- ◆ C-Sharp design
- ◆ Film Width: 80 mm
- ◆ Overall Length: 90 mm

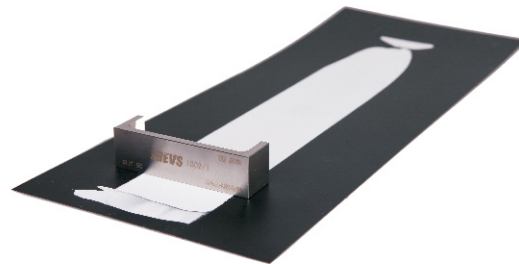

### ■ Order Information:

BEVS 1802/1: Two Sided Applicator	80 mm film width	gap size 25&50µm
BEVS 1802/2: Two Sided Applicator	80 mm film width	gap size 75&100µm
BEVS 1802/3: Two Sided Applicator	80 mm film width	gap size 150&200µm
BEVS 1802/4: Two Sided Applicator	80 mm film width	gap size 300&400µm

- Other width and gap size are available upon request.