


Adjustable Applicator

Introduction:

Adjustable Applicator is applied to evaluate the slight difference of the film thickness accurately. It can control the film thickness by adjusting the two differentiators and scraper. And the gap is the final thickness.

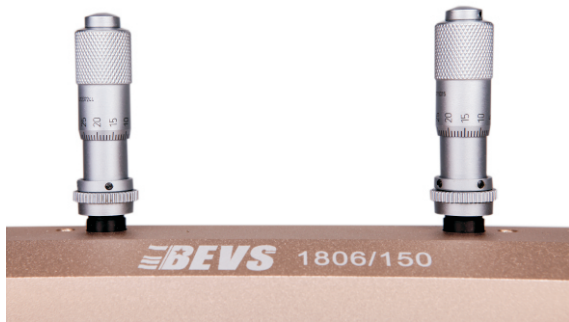

BEVS 1806/50



BEVS 1806/250

Technical Specification:

- ◆ Stainless steel –wear resistance
- ◆ 6 film widths are available:
50/150/250/300 mm
- ◆ Precision: $\pm 2\mu\text{m}$
- ◆ Film thickness range: 0–3500 μm
- ◆ In 10 μm increment

Order Information:


BEVS 1806/50	Adjustable Applicator	50 mm Width
BEVS 1806/150	Adjustable Applicator	150 mm Width
BEVS 1806/250	Adjustable Applicator	250 mm Width
BEVS 1806/300	Adjustable Applicator	300 mm Width

Other width and gap size are available upon request.

In order to facilitate the rapid application of wet film and quick cleaning after use, BEVS developed two new models of adjustable film applicator.

BEVS 1806/A: Diversion baffle make the operation more convenient.

Smart magnetical design for quick cleaning after use.

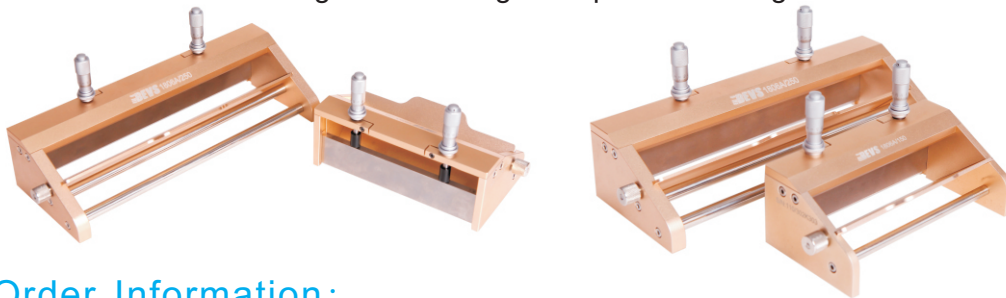


■ Order Information:

BEVS 1806A/50	Adjustable Applicator	50 mm Width
BEVS 1806A/100	Adjustable Applicator	100 mm Width
BEVS 1806A/150	Adjustable Applicator	150 mm Width
BEVS 1806A/200	Adjustable Applicator	200 mm Width
BEVS 1806A/250	Adjustable Applicator	250 mm Width
BEVS 1806A/300	Adjustable Applicator	300 mm Width

■ Other width and gap size are available upon request.

BEVS 1806/B: Smart magnetical design for quick cleaning after use.

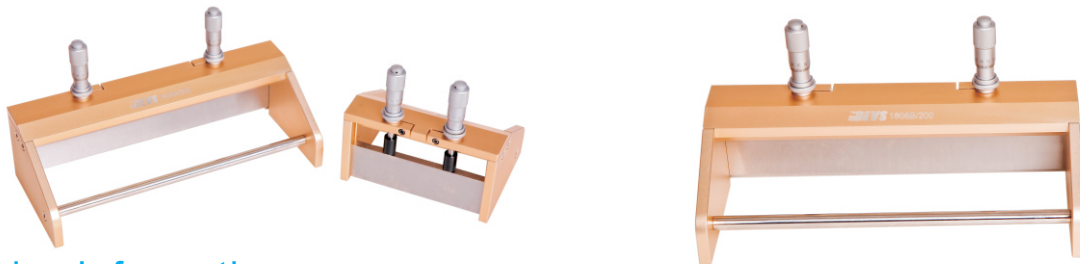

■ Order Information:

BEVS 1806B/50	Adjustable Applicator	50 mm Width
BEVS 1806B/100	Adjustable Applicator	100 mm Width
BEVS 1806B/150	Adjustable Applicator	150 mm Width
BEVS 1806B/200	Adjustable Applicator	200 mm Width
BEVS 1806B/250	Adjustable Applicator	250 mm Width
BEVS 1806B/300	Adjustable Applicator	300 mm Width

■ Other width and gap size are available upon request.