

Phase cut /Triac dimmable driver-PWM output KVF-TDWL series 96W

Whole Family
KVF-XXXXX-TDWL 12V 24VDC
30W 36W 60W 96W 100W



■Features

- Output constant voltage
- UL, cUL listed, Class 2, Class P, Type HL
- Universal AC input: 100-277VAC
- Power Factor: up to 0.99
- High efficiency : up to 88%
- Dimming range: 0-100%
- Load: 10-100%
- Protection:short circuit/over loading/ Over temperature
- PWM output, does not change the color index
- Full protection aluminum case, for dry , damp and wet locations
- Flicker-free
- Compatible with Forward phase, Reverse phase, Triac, MLV, ELV Dimmers
- Cooling by free air convection
- Suitable for LED lighting and moving sign applications



Class 2 Class P

■Specification


Model		KVF-24096-TDWL
Certificates		FCC UL cUL Class 2
Output	DC Voltage	24V
	Rated Current	4A
	Rated Power	96W
	Voltage Tolerance	±0.5V
	Voltage Regulation	±0.5%
	Load Regulation	±1%
Input	Voltage Range	100-277VAC
	Frequency Range	47-63Hz
	Power Factor (Typ.) @ full load	0.99@120VAC 0.95@277VAC
	THD (Typ.) @ full load	120V<10%; 277V<15%
	Efficiency (Typ.) @ full load	88%
	AC Current (Max.)	1.3A@100VAC
	Inrush Current (Typ.)	120V--11A, 50%, 1.04ms ; 277V--27A, 50%, 960us
	Leakage current	<0.50mA
Protection	Short Circuit	shut down o/p voltage, re-power on to recover after fault condition is removed
	Over Loading	≤120% Hiccup mode,recovers automatically after fault condition is removed.
	Over temperature	100℃±10℃ shut down o/p voltage, automatically recover after cooling.
Environment	Working TEMP.	-40~+60℃ (see below derating curve)
	Working Humidity	20~90%RH, non-condensing
	Storage TEMP. Humidity	-40~+80℃, 10~95%RH
	TEMP .coefficient	±0.03%/℃ (0~50℃)
	Vibration	10~500Hz, 5G 10min./1 cycle,period for 60min. each along X,Y,Z axes
Safety& EMC	Safety standards	UL8750+UL1310, CAN/CSA-C22.2 No.250.13
	Withstand voltage	I/P-O/P:1.88KVac
	Isolation resistance	I/P-O/P:100MΩ/500VDC/25℃/70%RH
	EMC EMISSION	FCC 47 CRF Part 15, Subpart B
others	Net. Weight	0.55Kg
	Size	330*32*23mm (L*W*H)
	packing	360*270*175mm/30pcs /CTN

Phase cut /Triac dimmable driver-PWM output KVF-TDWL series 96W

Notes

1. All parameters if NOT specially mentioned are measured at 120VAC input , rated load and 25°C of ambient temperature.
2. To extend the driver's using life ,please reduce the loading at lower input voltage.

Derating Curve

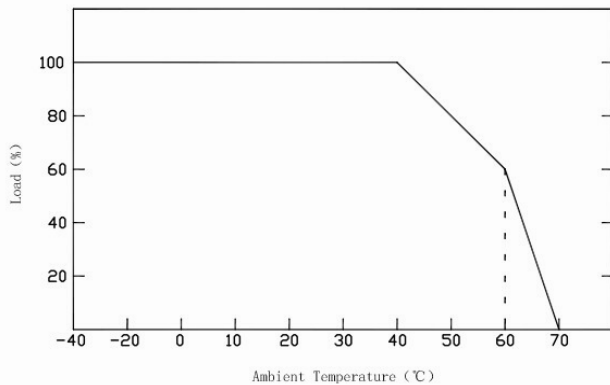


※To extend their life, please refer to the Derating Curve and derate according to the temperature.

Mechanical Specification

Unit: mm

Tolerance: P 0.5-2mm

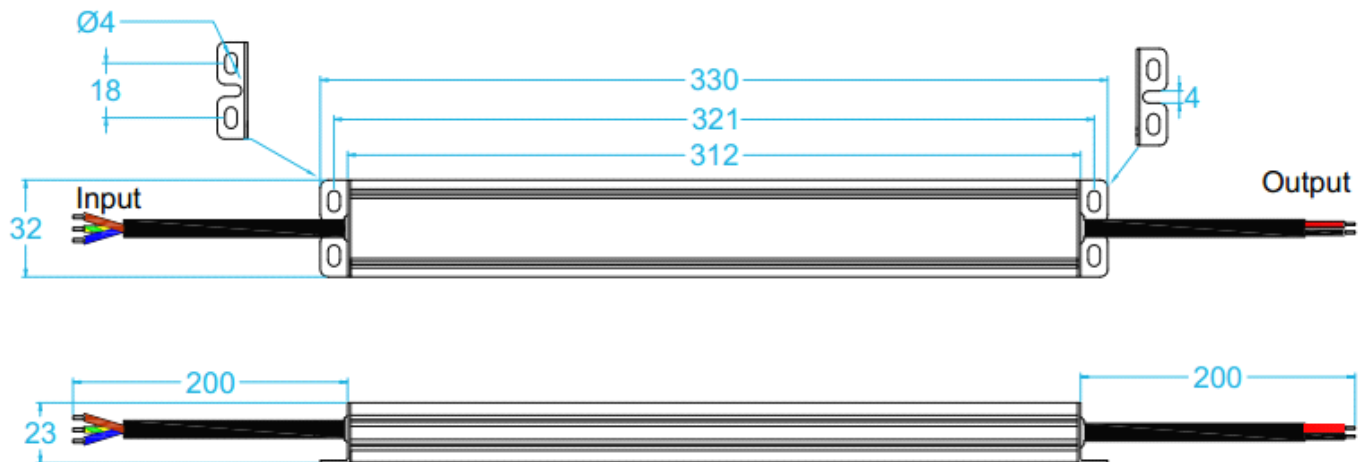

※Input Rubber cable SJOW 18AWG (3C*0.824mm²), the green cable connect with (FG), Black with AC (L), White with AC(N)

※Output Rubber cable SJOW 18AWG (2C*0.824mm²), Red is output(V+) Positive, Black is output (V-) negative. Connected to LED Lamps.

※Please make sure you connect these correctly otherwise your product will not function correctly and could be damaged.

※Note: Any other requests we can customized.

Dimming Operation

※The Pulse-Width Modulation (PWM) of output voltage can be adjusted through input terminal of the AC phase line(L) by connection a phase/triac dimmer.




※Usually matching with Forward phase , leading edge , Magnetic low voltage, triac dimmers, or Reverse phase, trailing edge ,Electric

Phase cut /Triac dimmable driver-PWM output KVF-TDWL series 96W

low voltage Dimmers.

※Please try to use dimmers with power at least 1.5 times as the output power of the driver.

■ Connecting Diagram

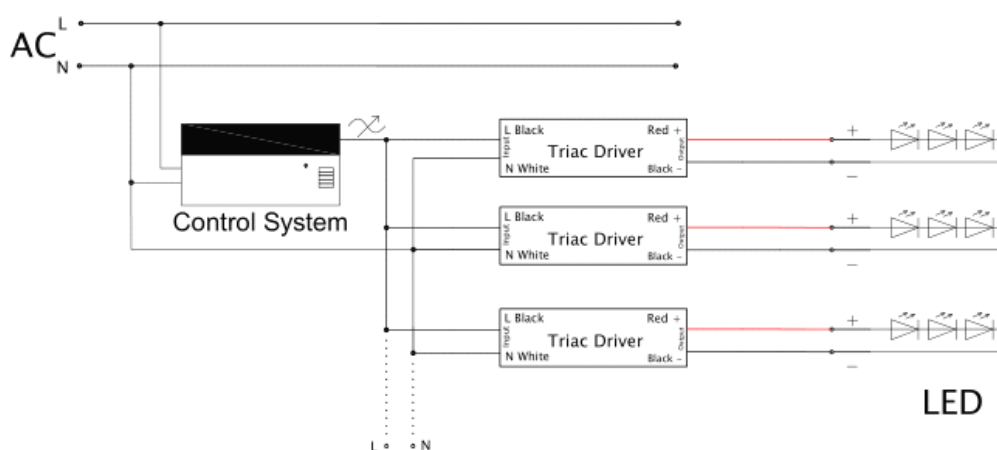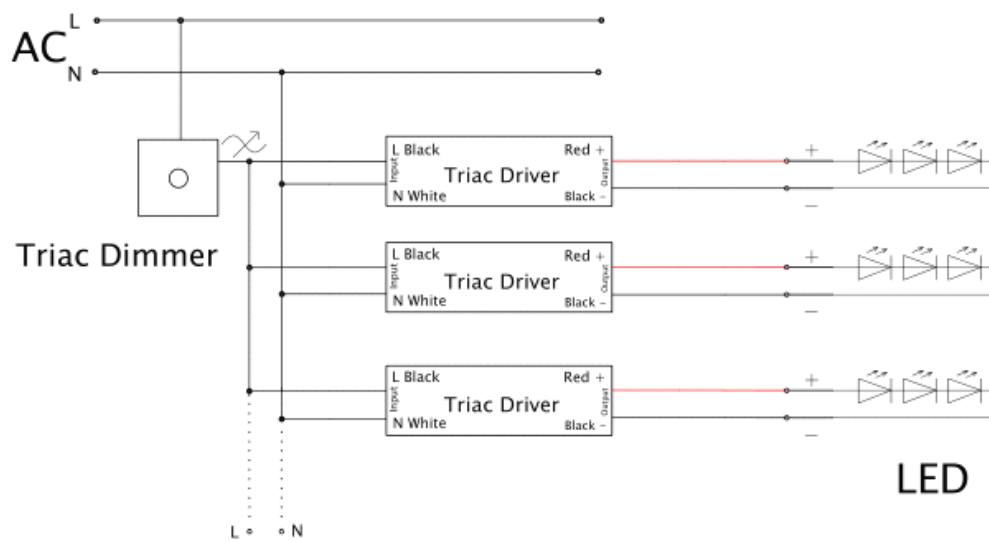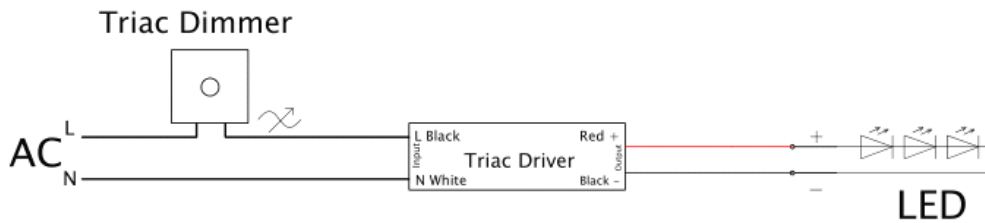

■ Instruction:

- 1) This driver should be installed by qualified and professional person;
- 2) Please make sure the driver is installed with adequate ventilation around it to allow for heat dissipation.
- 3) Ensure that wiring is correct before test in order to avoid light and power supply damage;
- 4) If driver Cannot work normally, don't maintain privately; Have any question, please contact Zhuhai Shengchang.

Please visit our website or contact us for more information! www.scpower.net.cn