


2 FLUTE

STANDARD LENGTH
SMALL CORNER RADIUS END MILLS

0.0150" - 0.2500" DIAMETER
Mirror Surface Finishes
Sub Micron Grain Carbide

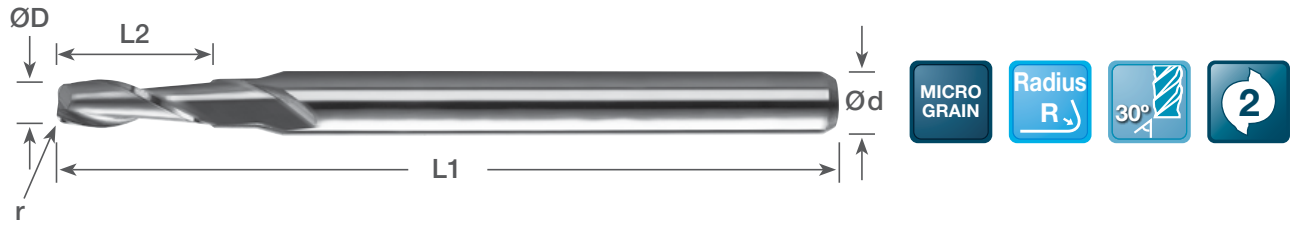

SMALL Corner Radius STANDARD Length (Inch Sizes)

Uncoated		ATIN Coating		DLC* Coating		Dimensions (in)				
Part Number	Stock	Part Number	Stock	Part Number	Stock	ØD ^{+0.0000 -0.0010}	Ød	L1	L2	r
1612-0150.045CR	●	1612-0150L045CR	●	1612-0150D045CR	■	0.0150	1/8	1 1/2	0.045	0.003
1612-0156.045CR	●	1612-0156L045CR	●	1612-0156D045CR	■	0.0156 (1/64)	1/8	1 1/2	0.045	0.003
1612-0200.060CR	●	1612-0200L060CR	●	1612-0200D060CR	■	0.0200	1/8	1 1/2	0.060	0.005
1612-0250.075CR	●	1612-0250L075CR	●	1612-0250D075CR	■	0.0250	1/8	1 1/2	0.075	0.005
1612-0300.090CR	●	1612-0300L090CR	●	1612-0300D090CR	■	0.0300	1/8	1 1/2	0.090	0.005
1612-0312.093CR	●	1612-0312L093CR	●	1612-0312D093CR	■	0.0312 (1/32)	1/8	1 1/2	0.093	0.005
1612-0350.105CR	●	1612-0350L105CR	●	1612-0350D105CR	■	0.0350	1/8	1 1/2	0.105	0.005
1612-0400.120CR	●	1612-0400L120CR	●	1612-0400D120CR	■	0.0400	1/8	1 1/2	0.120	0.005
1612-0450.135CR	●	1612-0450L135CR	●	1612-0450D135CR	■	0.0450	1/8	1 1/2	0.135	0.005
1612-0469.141CR	●	1612-0469L141CR	●	1612-0469D141CR	■	0.0469 (3/64)	1/8	1 1/2	0.141	0.005
1612-0500.150CR	●	1612-0500L150CR	●	1612-0500D150CR	■	0.0500	1/8	1 1/2	0.150	0.010
1612-0550.165CR	●	1612-0550L165CR	●	1612-0550D165CR	■	0.0550	1/8	1 1/2	0.165	0.005
1612-0600.180CR	●	1612-0600L180CR	●	1612-0600D180CR	■	0.0600	1/8	1 1/2	0.180	0.010
1612-0625.186CR	●	1612-0625L186CR	●	1612-0625D186CR	■	0.0625 (1/16)	1/8	1 1/2	0.186	0.005
1612-0650.195CR	●	1612-0650L195CR	●	1612-0650D195CR	■	0.0650	1/8	1 1/2	0.195	0.005
1612-0700.210CR	●	1612-0700L210CR	●	1612-0700D210CR	■	0.0700	1/8	1 1/2	0.210	0.010
1612-0750.225CR	●	1612-0750L225CR	●	1612-0750D225CR	■	0.0750	1/8	1 1/2	0.225	0.005
1612-0781.234CR	●	1612-0781L234CR	●	1612-0781D234CR	■	0.0781 (5/64)	1/8	1 1/2	0.234	0.005
1612-0800.240CR	●	1612-0800L240CR	●	1612-0800D240CR	■	0.0800	1/8	1 1/2	0.240	0.010
1612-0850.255CR	●	1612-0850L255CR	●	1612-0850D255CR	■	0.0850	1/8	1 1/2	0.255	0.005
1612-0900.270CR	●	1612-0900L270CR	●	1612-0900D270CR	■	0.0900	1/8	1 1/2	0.270	0.010
1612-0938.279CR	●	1612-0938L279CR	●	1612-0938D279CR	■	0.0938 (3/32)	1/8	1 1/2	0.279	0.005
1612-0950.285CR	●	1612-0950L285CR	●	1612-0950D285CR	■	0.0950	1/8	1 1/2	0.285	0.005
1612-1000.300CR	●	1612-1000L300CR	●	1612-1000D300CR	■	0.1000	1/8	1 1/2	0.30	0.010
1612-1250.500CR	●	1612-1250L500CR	●	1612-1250D500CR	■	0.1250 (1/8)	1/8	1 1/2	0.500	0.005
1612-1562.562CR	●	1612-1562L562CR	●	1612-1562D562CR	■	0.1562 (5/32)	3/16	2	0.562	0.010
1612-1875.625CR	●	1612-1875L625CR	●	1612-1875D625CR	■	0.1875 (3/16)	3/16	2	0.625	0.010
1612-2500.750CR	●	1612-2500L750CR	●	1612-2500D750CR	■	0.2500 (1/4)	1/4	2 1/2	0.750	0.010

Corner Radius Tolerance

*DLC is Amorphous Diamond

Diameter (D)	0.0150" - 0.0350"	0.0400" - 0.1000"	0.1250" - 0.1875"	0.2500"
+ / -	0.0010"	0.0015"	0.0020"	0.0030"

SERIES 1612 WORKPIECE MATERIAL

Coating	P	P	H	H	M	K	N	N	N	N	N	N	N	S	S	
	Steel ~30HRC	Steel 30-40HRC	Hardened Steel ~55HRC	Hardened Steel ~68HRC	Stainless Steel	Cast Iron	Aluminum	Graphite	Copper Alloy	Brass	CFRP	Plastic	Thermcoat Plastic	High Density Plastic	Nickel / Cobalt	Titanium Alloy
ATIN	★	★	★	☆	☆	☆									☆	☆
DLC							☆	★	☆	☆	★	★	★			
Uncoated							☆	☆	★	★	☆	★	★	☆		☆

★ : Priority ☆ : Applicable Materials

Recommended Cutting Conditions Page L221, L223

Symbol Descriptions Page L3

● : U.S. Stock Standard
■ : NOT STOCKED - Call for Delivery

(U.S.) 1.888.848.8449
(International) 001.714.428.3636
Visit us online at KyoceraPrecisionTools.com

INSERT GRADES **A**
TURNING INSERTS **B**
GEN/PCD INSERTS **C**
TURNING HOLDERS **D**
SMALL TOOLS **E**
BORING **F**
GROOVING **G**
CUT-OFF **H**
THREADING **J**
DRILLING **K**
SOLID TOOLS **L**
MILLING **M**
HSK TOOLING **N**
SPARE PARTS **P**
TECHNICAL **R**
INDEX **T**