


3 FLUTE

STANDARD LENGTH BALL NOSE END MILLS

0.0100" - 0.1000" DIAMETER

Mirror Surface Finishes

Sub Micron Grain Carbide

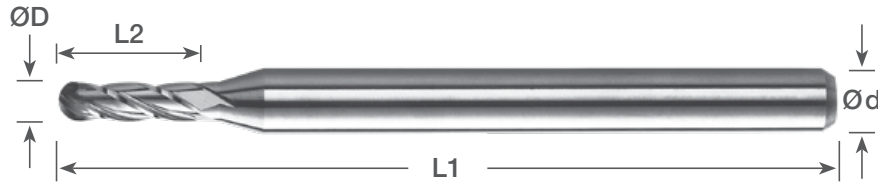

STANDARD Length (Inch Sizes)

Uncoated		AlTiN Coating		DLC* Coating		Dimensions (in)			
Part Number	Stock	Part Number	Stock	Part Number	Stock	ØD ^{+0.0000} _{-0.0010}	Ød	L1	L2
1725-0100.050	●	1725-0100L050	●	1725-0100D050	■	0.0100	1/8	2 1/2	0.050
1725-0150.075	●	1725-0150L075	●	1725-0150D075	■	0.0150	1/8	2 1/2	0.075
1725-0156.078	●	1725-0156L078	●	1725-0156D078	■	0.0156 (1/64)	1/8	2 1/2	0.078
1725-0156.125	●	1725-0156L125	●	1725-0156D125	■	0.0156 (1/64)	1/8	2 1/2	0.125
1725-0200.100	●	1725-0200L100	●	1725-0200D100	■	0.0200	1/8	2 1/2	0.100
1725-0200.160	●	1725-0200L160	●	1725-0200D160	■	0.0200	1/8	2 1/2	0.160
1725-0250.125	●	1725-0250L125	●	1725-0250D125	■	0.0250	1/8	2 1/2	0.125
1725-0250.203	●	1725-0250L203	●	1725-0250D203	■	0.0250	1/8	2 1/2	0.203
1725-0300.150	●	1725-0300L150	●	1725-0300D150	■	0.0300	1/8	2 1/2	0.150
1725-0312.156	●	1725-0312L156	●	1725-0312D156	■	0.0312 (1/32)	1/8	2 1/2	0.156
1725-0312.250	●	1725-0312L250	●	1725-0312D250	■	0.0312 (1/32)	1/8	2 1/2	0.250
1725-0312.375	●	1725-0312L375	●	1725-0312D375	■	0.0312 (1/32)	1/8	2 1/2	0.375
1725-0350.175	●	1725-0350L175	●	1725-0350D175	■	0.0350	1/8	2 1/2	0.175
1725-0400.200	●	1725-0400L200	●	1725-0400D200	■	0.0400	1/8	2 1/2	0.200
1725-0400.325	●	1725-0400L325	●	1725-0400D325	■	0.0400	1/8	2 1/2	0.325
1725-0450.225	●	1725-0450L225	●	1725-0450D225	■	0.0450	1/8	2 1/2	0.225
1725-0469.250	●	1725-0469L250	●	1725-0469D250	■	0.0469 (3/64)	1/8	2 1/2	0.250
1725-0469.375	●	1725-0469L375	●	1725-0469D375	■	0.0469 (3/64)	1/8	2 1/2	0.375
1725-0469.570	●	1725-0469L570	●	1725-0469D570	■	0.0469 (3/64)	1/8	2 1/2	0.570
1725-0500.300	●	1725-0500L300	●	1725-0500D300	■	0.0500	1/8	2 1/2	0.300
1725-0500.400	●	1725-0500L400	●	1725-0500D400	■	0.0500	1/8	2 1/2	0.400
1725-0550.385	●	1725-0550L385	●	1725-0550D385	■	0.0550	1/8	2 1/2	0.385
1725-0600.312	●	1725-0600L312	●	1725-0600D312	■	0.0600	1/8	2 1/2	0.312
1725-0600.500	●	1725-0600L500	●	1725-0600D500	■	0.0600	1/8	2 1/2	0.500
1725-0625.312	●	1725-0625L312	●	1725-0625D312	■	0.0625 (1/16)	1/8	2 1/2	0.312
1725-0625.500	●	1725-0625L500	●	1725-0625D500	■	0.0625 (1/16)	1/8	2 1/2	0.500
1725-0650.500	●	1725-0650L500	●	1725-0650D500	■	0.0650	1/8	2 1/2	0.500
1725-0700.500	●	1725-0700L500	●	1725-0700D500	■	0.0700	1/8	2 1/2	0.500
1725-0750.500	●	1725-0750L500	●	1725-0750D500	■	0.0750	1/8	2 1/2	0.500
1725-0800.750	●	1725-0800L750	●	1725-0800D750	■	0.0800	1/8	2 1/2	0.750
1725-0850.750	●	1725-0850L750	●	1725-0850D750	■	0.0850	1/8	2 1/2	0.750
1725-0900.750	●	1725-0900L750	●	1725-0900D750	■	0.0900	1/8	2 1/2	0.750
1725-0950.750	●	1725-0950L750	●	1725-0950D750	■	0.0950	1/8	2 1/2	0.750
1725-1000.750	●	1725-1000L750	●	1725-1000D750	■	0.1000	1/8	2 1/2	0.750

*DLC is Amorphous Diamond

- SOLID TOOLS
- DRILLS
- END MILLS
- ROUTERS
- THREAD MILLS & TAPS
- ENGRAVERS
- BORING BARS
- REAMERS
- TECHNICAL

SERIES 1725 WORKPIECE MATERIAL																
Coating	P Steel ~30HRC	P Steel 30-40HRC	H Hardened Steel ~55HRC	H Hardened Steel ~68HRC	M Stainless Steel	K Cast Iron	N Aluminum	N Graphite	N Copper Alloy	N Brass	N CFRP	N Plastic	N Thermoset Plastic	N High Density Plastic	S Nickel / Cobalt	S Titanium Alloy
AlTiN	★	★	★	☆	☆	☆									☆	☆
DLC							☆	★	☆	☆	★	★	★			
Uncoated							☆	☆	☆	★	☆	☆	☆	☆		☆

★ : Priority ☆ : Applicable Materials

Recommended Cutting Conditions Page L221

Symbol Descriptions Page L3