
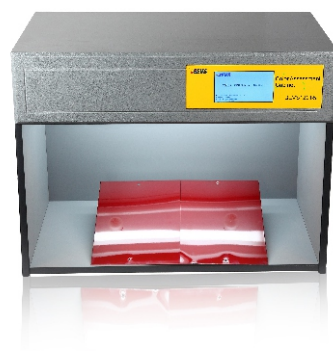


Color Assessment Cabinet


Introduction:

To avoid assessment error when performing color contrast, it is easy to simulate different light sources to compare color difference via touch screen panel. Ideal application for the Graphic Arts, Photographic, Textile, Dyeing, Packaging, Printing, Leather, Inks, Knitwear, Plastic, Automotive and Ceramics industries.



Features:

- ◆ Up to 6 light sources
- ◆ Easy to operate via touch screen
- ◆ Automatically alternating among light sources



Technical info:

Light	Description	Color Temperature	Power
D65	International Standard Artificial Daylight	6500K	18W
TL84	Applied to stores in Europe, Japan and China	4000K	18W
CWF	(Cool White Fluorescent) American Standard	4150K	18W
F	"Sun-setting Light Yellow" incandescent light source (imitation of sunset)	2700K	40W
UV	Viewing under ultraviolet light to detect and evaluate optical brighteners or fluorescent pigments	365nm	18W
U30	Warm White Fluorescent, American Standard	3000K	18W

Order info:

Model	D65	TL84	CWF	F	UV	U30	Exterior size	Interior size
BEVS1201/5	2	2	2	4	1	0	710x405x570 mm	670x350x380 mm
BEVS1201/6	2	2	2	4	1	2	710x530x570 mm	670x350x500 mm

Optional accessory: 45° Sample observing table