


4刃 APOLLO

可变螺旋角设计铣刀

直径:3MM-25MM
可变螺旋角设计
非对称开槽减少颤动
可用于粗、精加工铣削

对合金钢、镍铬铁合金、不锈钢以及碳素钢加工性能优越

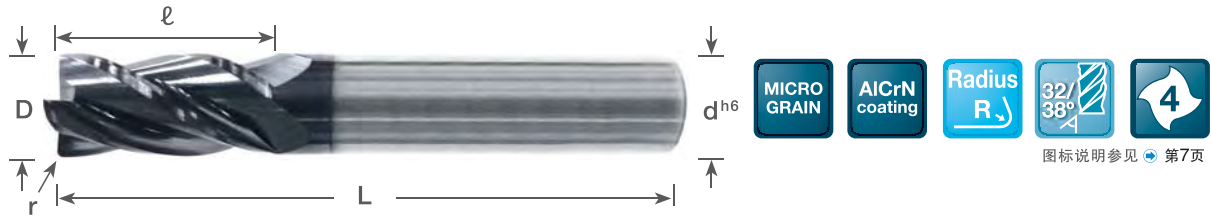

图标说明参见 第7页

短刃(公制规格)

尺寸(mm)					AlCrN Coating	
D^{h10}	d^{h6}	l	L	r	产品编号	库存
3	3	6	38	0.4	AP4M-1181.236	●
6	6	10	50	0.4	AP4M-2362.394	●
8	8	12	50	0.4	AP4M-3150.472	●
10	10	12	50	0.4	AP4M-3937.787	●
12	12	16	63	0.7	AP4M-4724.630	●
16	16	20	89	0.7	AP4M-6299.787	●
20	20	22	101	0.7	AP4M-7874.866	●

标准刃(公制规格)

尺寸(mm)					AlCrN Coating	
D^{h10}	d^{h6}	l	L	r	产品编号	库存
4	4	14	51	0.4	AP4M-1575.551	●
6	6	20	63	0.4	AP4M-2362.787	●
8	8	20	63	0.4	AP4M-3150.787	●
10	10	25	70	0.4	AP4M-3937.984	●
12	12	25	76	0.6	AP4M-4724.984	●
16	16	32	89	0.7	AP4M-6299.1260	●
20	20	38	100	0.7	AP4M-7874.1496	●
25	25	38	100	0.7	AP4M-10000.1496	●

加长刃(公制规格)

尺寸(mm)					AlCrN Coating	
D^{h10}	d^{h6}	l	L	r	产品编号	库存
6	6	25	75	0.4	AP4M-2362.984	●
8	8	25	75	0.4	AP4M-3150.984	●
10	10	30	75	0.4	AP4M-3937.1181	●
12	12	50	100	0.6	AP4M-4724.1969	●
14	14	50	125	0.6	AP4M-5511.1969	●
16	16	50	125	0.7	AP4M-6299.1969	●
18	18	50	125	0.7	AP4M-7087.1969	●
20	20	50	125	0.8	AP4M-7874.1969	●
25	25	50	125	0.8	AP4M-10000.1969	●

AP4M优先适用材料排序															
涂层	P	P	H	H	M	K	N	N	N	N	N	N	S	S	
	Steel ~30HRC	Steel 30~40HRC	Hardened Steel ~55HRC	Hardened Steel ~68HRC	Stainless Steel	Cast Iron	Aluminum	Graphite	Copper Alloy	CFRP	Plastic	Thermoset Plastic	High Density Plastic	Nickel / Cobalt	Titanium Alloy
AlCrN	☆	☆	★	★	★	☆			☆					★	★

★: 推荐被加工材料 ☆: 适用被加工材料

图标说明参见 第7页

●: U.S.标准库存
■: 无库存-定制交付
▲: 库存待定